

WAAS  
CH **61205**  
**W36A**

APP CRS  
**360°**

Rwy Idg  
TDZE **1497**  
Apt Elev **1498**

**RNAV (GPS) RWY 36**

MC PHERSON (MPR)

▽

▲ NA



When local altimeter setting not received, use Salina altimeter setting: increase LPV DA to 1838 feet, LNAV/VNAV DA to 2074 feet and all visibilities  $\frac{3}{8}$  mile; increase all MDA 100 feet and visibility Cat C  $\frac{1}{4}$  mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Salina altimeter setting. DME/DME RNP-0.3 NA. Circling NA to Rwy's 8 and 26.

MISSED APPROACH:  
Climb to 3400 direct INMOM and hold.

AWOS-3P  
**119.025**

WICHITA APP CON  
**125.5 306.2**

UNICOM  
**122.8 (CTAF) 0**

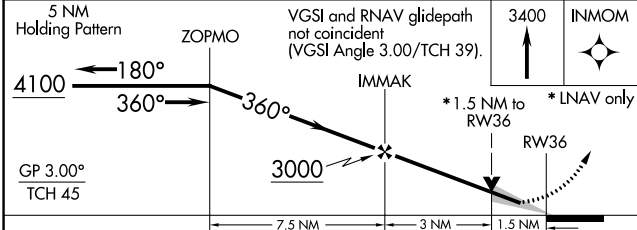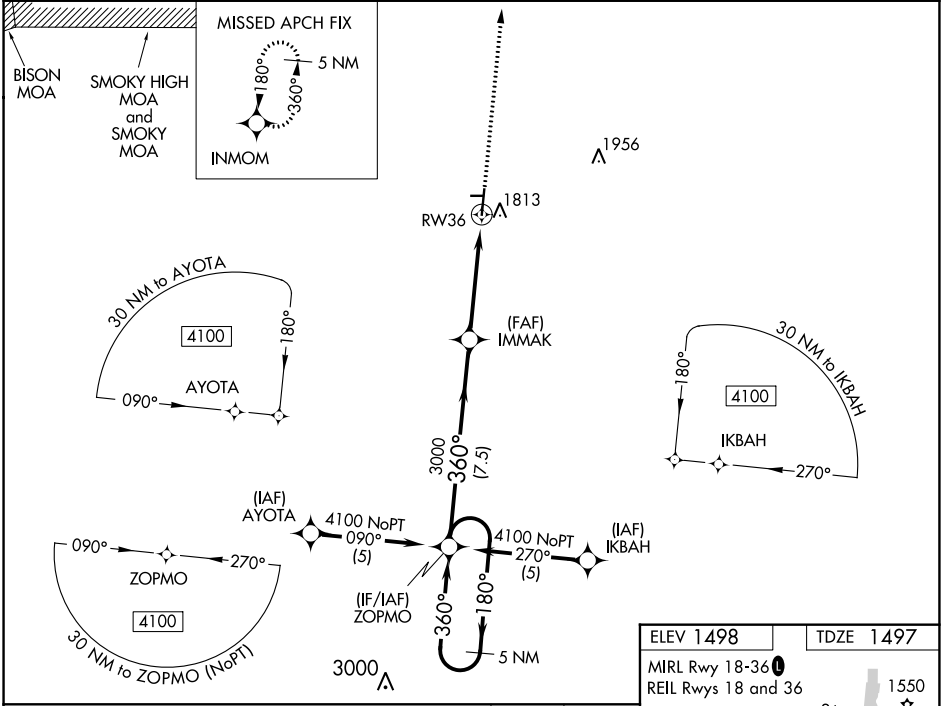

CATEGORY	A	B	C	D
LPV DA	1747- $\frac{3}{4}$	250 (300- $\frac{3}{4}$ )		NA
LNAV/DA	1983-1 $\frac{5}{8}$	486 (500-1 $\frac{1}{8}$ )		NA
LNAV MDA	2020-1	523 (600-1)	2020-1 $\frac{1}{2}$ 523 (600-1 $\frac{1}{2}$ )	NA
CIRCLING	2120-1	622 (700-1)	2120-1 $\frac{3}{4}$ 622 (700-1 $\frac{3}{4}$ )	NA

