



WAAS CH 97302 W27A	APP CRS 275°	Rwy Idg TDZE 58 Apt Elev 83
--	------------------------	---

RNAV (GPS) RWY 27
Tallahassee Intl (TLH)

RNP APCH. ▼ ▲ ASR For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C.		ALSF-2 ▲	MISSED APPROACH: Climb to 3000 direct RAGKO and hold.		
ATIS 119.45 239.25	Tallahassee APP CON ★ 135.8 317.4	Tallahassee Tower ★ 118.7 (CTAF) 0 257.8	GND CON 121.9 348.6	CLNC DEL 126.65 275.8	UNICOM 123.075

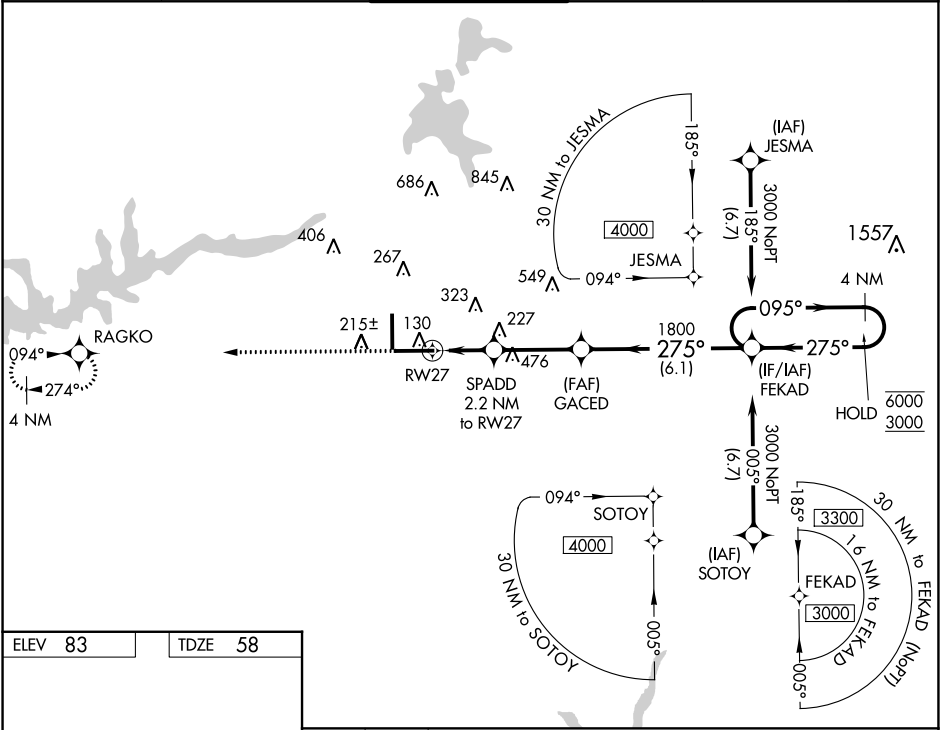

ELEV 83	TDZE 58
----------------	----------------

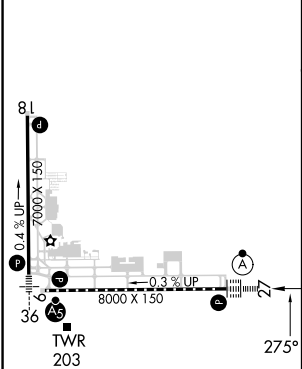

TDZ/CL Rwy 27
REIL Rwy 9 and 18
HRL Rwy 9-27 and 18-36

3000 RAGKO *LNAV only.		SPADD 2.2 NM to RWY 27	GACED 1800	FEKAD 4 NM Holding Pattern
RWY 27 1.2 NM		1 NM	3.1 NM	6.1 NM
800*		1800	275°	095° 6000 275° 3000
GP 3.00° TCH 59				
CATEGORY	A	B	C	D
LPV DA	258/18 200 (200-½)			
LNAV/VNAV DA	375/30 317 (300-⅝)			
LNAV MDA	480/24	422 (400-½)	480/40	422 (400-¾)
CIRCLING	580-1 497 (500-1)	600-1 517 (600-1)	640-1½ 557 (600-1½)	800-2¼ 717 (800-2¼)