

WAAS CH <b>90238</b> <b>W28A</b>	APP CRS <b>281°</b>	Rwy Idg TDZE Apt Elev	<b>4103</b> <b>796</b> <b>800</b>
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 28  
PLYMOUTH MUNI (C65)

RNP APCH - GPS.

▼ Baro-VNAV NA when using South Bend altimeter setting. Rwy 28 helicopter visibility reduction below 1 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use South Bend altimeter setting and increase LPV DA to 1154 feet and visibility all Cats ¼ SM; LNAV/VNAV DA to 1240 feet and visibility all Cats ½ SM, increase all MDAs 60 feet and LNAV visibility Cat C ½ SM, and Circling visibility Cat C ¼ SM. Straight-in Rwy 28 NA at night, Circling Rwy 28 NA at night.

**MISSED APPROACH:** Climb to 3000 direct PHONO and hold.

AWOS-3 <b>133.025</b>	SOUTH BEND APP CON ★ <b>132.05 257.8</b>	UNICOM <b>122.975 (CTAF) 0</b>
--------------------------	---	-----------------------------------

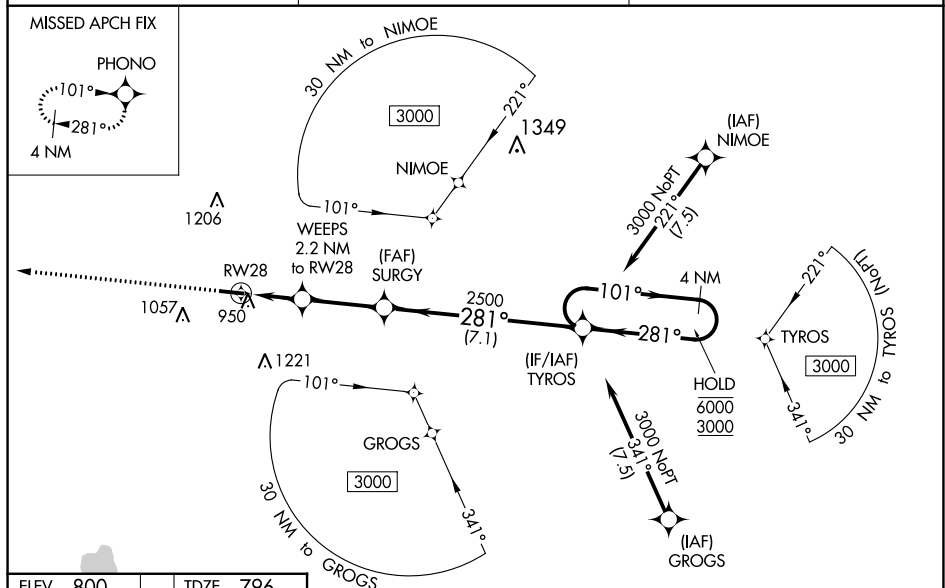

ELEV 800		TDZE 796
----------	--	----------

