

WAAS  
CH **70622**  
**W14A**

APP CRS  
**143°**

Rwy Idg  
TDZE  
Apt Elev  
**5054**  
**712**  
**716**


**RNAV (GPS) RWY 14**

SAULT STE MARIE MUNI/SANDERSON FLD (A.NJ)

RNP APCH.  
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C.  
▲ Rwy 14 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Chippewa County Intl altimeter setting and increase all DA 45 feet and all MDA 60 feet. Increase LNAV/VNAV all Cats visibilities to 1¼ mile and LNAV Cat C visibility to 1½ mile.

MISSED APPROACH:  
Climb to 3000 direct YIRUC and on track 147° to ALVUS and hold.

ASOS <b>118.375</b>	TORONTO CENTER <b>132.65 344.5</b>	UNICOM <b>122.7 (CTAF) 0</b>
------------------------	---------------------------------------	---------------------------------

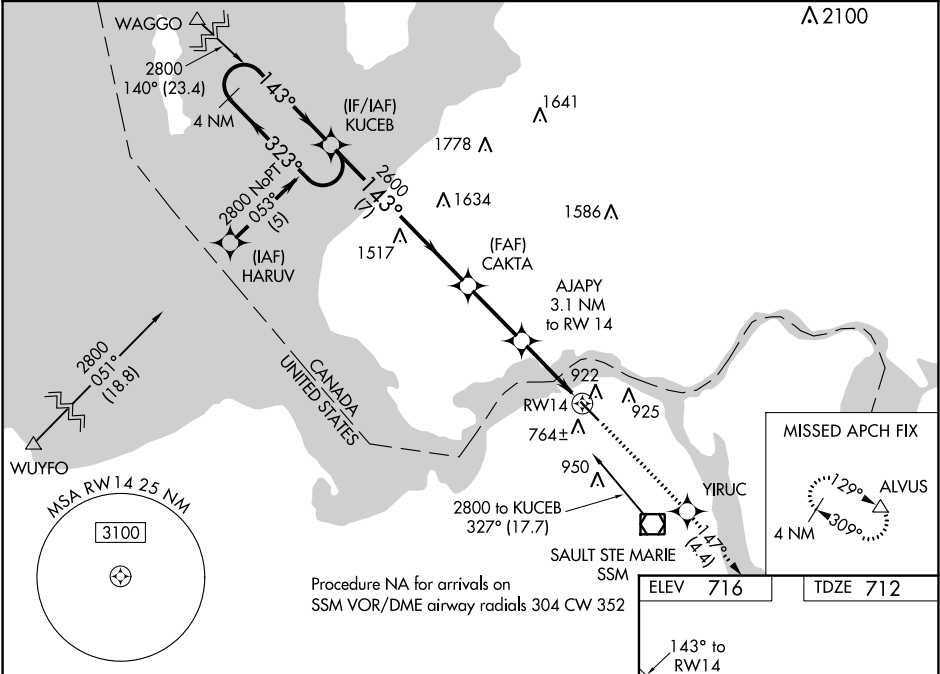

4 NM Holding Pattern KUCEB

2800 ← 323°  
143° →

GP 3.00°  
TCH 46

3000 YIRUC tr 147° ALVUS

CAKTA 2600 \*1720

AJAPY 3.1 NM to RW 14

\*LNAV only

7 NM 2.7 NM 3.1 NM

CATEGORY A B C D

LPV DA 962-1 250 (300-1) NA

LNAV/VNAV DA 1137-1¾ 425 (500-1¾) NA

LNAV MDA 1240-1 528 (600-1) 1240-1¾ 528 (600-1¾) NA

ELEV 716 TDZE 712

143° to RW 14

323 x 100

MIRL Rwy 14-32 0

REIL Rwy 14 and 32 0