


RNAV (GPS) Y RWY 18R  
CHARLOTTE/DOUGLAS INTL (CLT)

**⚠** Circling NA at night. Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNAV track guidance required during simultaneous operations. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500. For inop ALS, increase LNAV Cat C/D visibility to RVR 5500.



**MISSED APPROACH:** Climb to 1200 then climbing right turn to 4000 direct STULL and hold, continue climb-in-hold to 4000.

|             |        |  |       |
|-------------|--------|--|-------|
| (270°-360°) | 1047.8 |  | CPDLC |
| (180°-359°) | 257.2  |  |       |
| (360°-179°) | 307.8  |  |       |

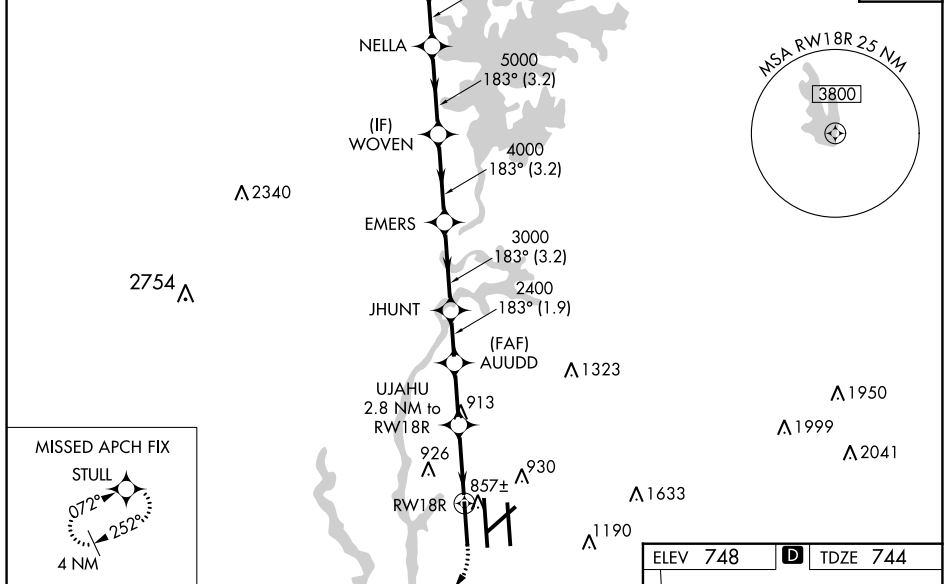

ELEV 748

D TDZE 744

←183°

381  
(A)

896  
★  
TWR  
910

0.65 DOWN  
10000 X 150

18L  
(A)  
9000 X 150

36L  
(A)  
3600 X 150

36C  
(A)  
3600 X 150

TWR  
1068

18R  
(A)  
8677 X 150

36R  
(A)  
3600 X 150

0.36 UP

HIRL all Rwys

REIL Rwys 18L and 23

TDZ/CL Rwys 18R, 36L, 36C and 36R

SE-2, 13 JUL 2023 to 10 AUG 2023