

WAAS
CH **90113**
W36A

APP CRS
002°

Rwy Idg
TDZE **2131**
Apt Elev **2131**

RNAV (GPS) RWY 36
KEARNEY RGNL (E.A.R.)


RNP APCH.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -23°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to ¾ SM.

MALSR

MISSED APPROACH: Climb to 4700 direct HONVA and hold.

AWOS-3PT 123.875	MINNEAPOLIS CENTER 119.4 278.8	UNICOM 123.0 (CTAF) 0
----------------------------	--	---------------------------------

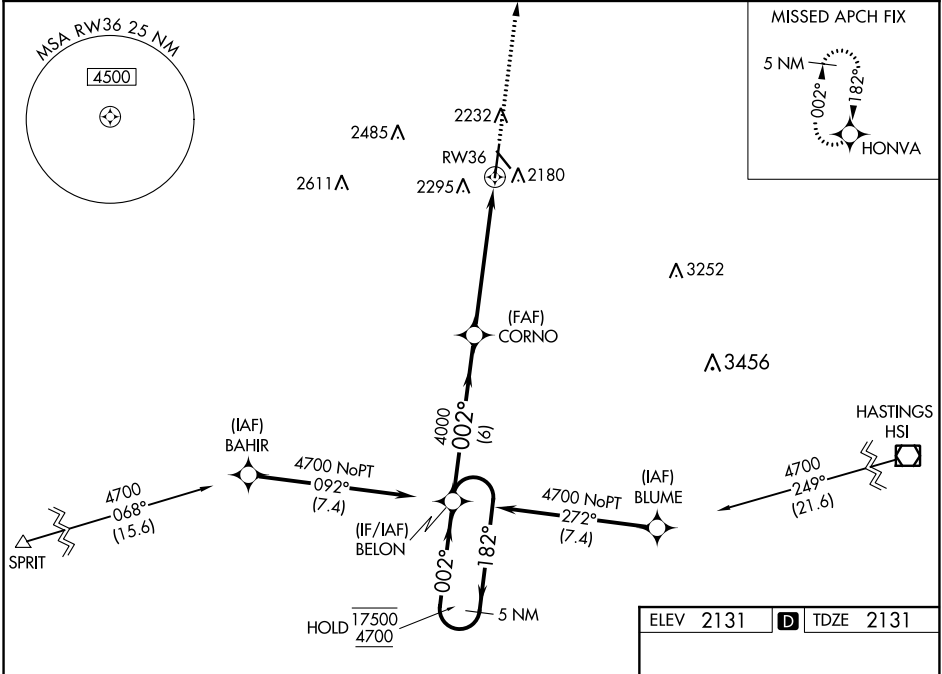

5 NM Holding Pattern

17500 4700

182°

002°

4000

6 NM

4.4 NM

1.3 NM

4700

HONVA

*1.3 NM to RW36

*LNAV only

GP 3.00° TCH 44

CATEGORY	A	B	C	D
LPV DA	2331-½ 200 (200-½)			
LNAV/VNAV DA	2419-½ 288 (300-½)			
LNAV MDA	2580-½ 449 (500-½)		2580-¾ 449 (500-¾)	
CIRCLING	2600-1 469 (500-1)		2640-1½ 509 (600-1½) 2840-2¼ 709 (800-2¼)	

ELEV 2131 D TDZE 2131

HIRL Rwy 18-36

MIRL Rwy 13-31

REIL Rwy 18