

WAAS CH <b>58118</b> <b>W30A</b>	APP CRS <b>301°</b>	Rwy ldg TDZE <b>493</b> Apt Elev <b>510</b>
--	------------------------	---

RNAV (GPS) RWY 30R  
MEADOWS FLD (BFL)


**RNP APCH.**

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F). Circling NA northeast of Rwy 12L-30R. When local altimeter setting not received, use Porterville altimeter setting: increase LPV DA to 790, LNAV/VNAV DA to 990. Increase LNAV/VNAV all Cats visibilities to 1 1/4 mile; increase all MDA 100 feet and LNAV visibility Cats C and D to RVR 5000. VDP and Baro-VNAV NA when using Porterville altimeter setting. For inop ALS when using Porterville altimeter setting, increase LPV all Cats visibility to RVR 5000 and LNAV Cat C and D visibility to 1%. # RVR 2400 when using Porterville altimeter setting.


**MALSR**







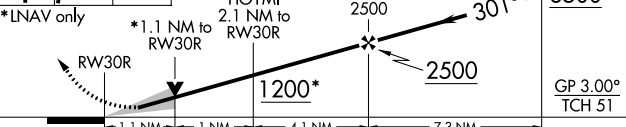

**MISSED APPROACH:**  
Climb to 1000 then climbing right turn to 3000 direct STEBN and hold.

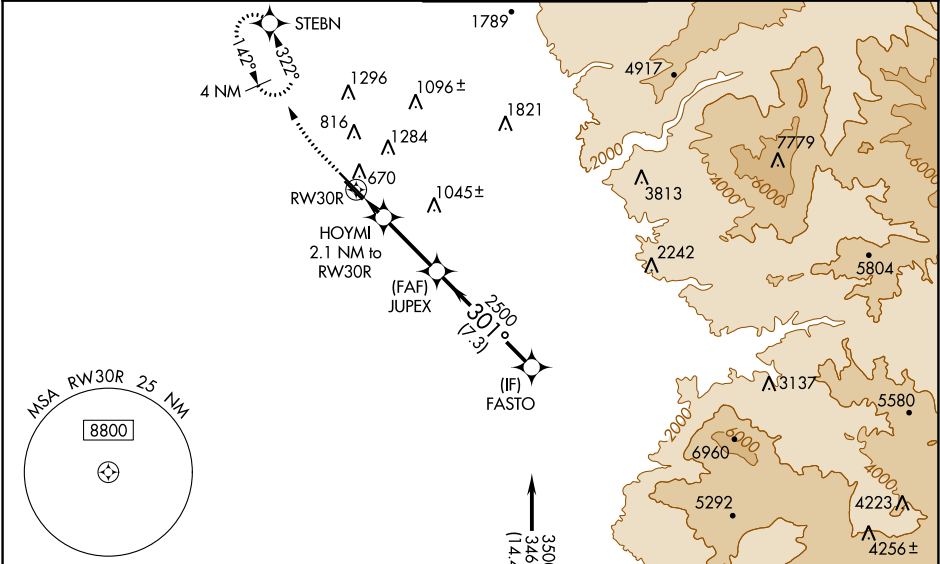ATIS <b>118.6</b>	BAKERSFIELD APP CON ★ <b>118.8 284.625 118.9 270.3</b> (SOUTH) (NORTH)	BAKERSFIELD TOWER ★ <b>118.1 (CTAF) 0 257.8</b>	GND CON <b>121.7</b>	UNICOM <b>122.95</b>
----------------------	--	--	-------------------------	-------------------------

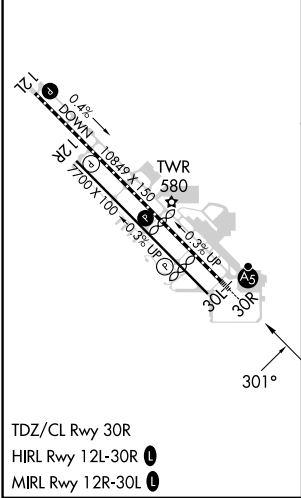

ELEV <b>510</b>	<b>D</b>	TDZE <b>493</b>
-----------------	----------	-----------------

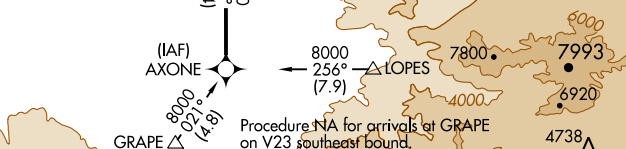

				
				
*LNAV only				
				
CATEGORY	A	B	C	D
LPV DA#	698/18 205 (200-½)			
LNAV/VNAV DA	898/45 405 (400-¾)			
LNAV MDA	880/24	387 (400-½)	880/35	387 (400-¾)
 CIRCLING	960-1	450 (500-1)	960-1½ 450 (500-1½)	1060-2 550 (600-2)