V

Δ

ASR

SC-3, 13 JUL 2023 to 10 AUG 2023

WAAS Rwy Idg 5501 APP CRS CH 63230 TDŻE 592 173° Apt Elev 592 W17A RNP APCH - GPS


RNAV (GPS) RWY 17 MC GREGOR EXEC (PWG)

MISSED APPROACH: Baro-VNAV NA when using Waco Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not Climb to 2500 direct ZUDIS and on track received, use Waco Rgnl altimeter setting and increase LPV DA to 873 feet and all visibilities

095° to SATTY and hold.

40 feet and Circling visibility Cat C 1/4 SM. WACO APP CON ★ GCO UNICOM 135,525 127.65 352.0 121.725 122.8 (CTAF)

1/8 SM; increase LNAV/VNAV DA to 873 feet and all visibilities 1/8 SM; increase all MDAs

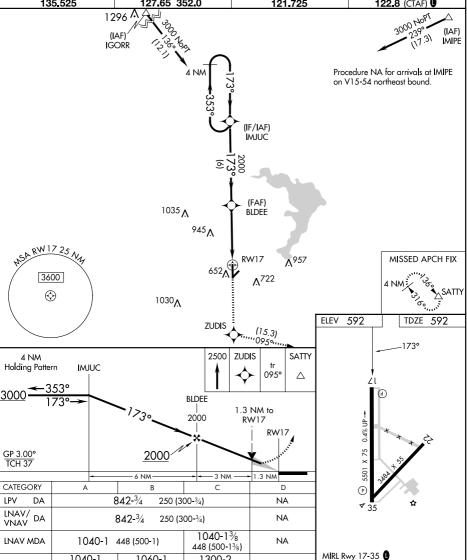

CIRCLING WACO, TEXAS Amdt 1C 15JUN23 1040-1

448 (500-1)

1060-1

468 (500-1)

MC GREGOR EXEC (PWG) RNAV (GPS) RWY 17

REIL Rwy 17 0

NA

1300-2

708 (800-2)