

WAAS CH <b>42818</b> <b>W25A</b>	APP CRS <b>246°</b>	Rwy Idg <b>5003</b> TDZE <b>147</b> Apt Elev <b>147</b>
--	------------------------	---

## RNAV (GPS) RWY 25


MARLBORO COUNTY JETPORT-H E AVENT FLD (BBP)

RNP APCH.

**V** Baro-VNAV NA when using Florence altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 47°C. Rwy 25 helicopter visibility reduction below  $\frac{3}{4}$  SM NA. When local altimeter setting not received, use Florence altimeter setting and increase all DA 61 feet and MDA 80 feet. Increase LPV all Cats, and LNAV Cat C and D visibility  $\frac{1}{4}$  mile.

**MISSED APPROACH:** Climb to 2500 direct LONCI and hold.

AWOS-3PT <b>123.825</b>	FLORENCE APP CON ★ <b>118.6 341.7</b>	UNICOM <b>122.8</b> (CTAF)
----------------------------	--	-------------------------------

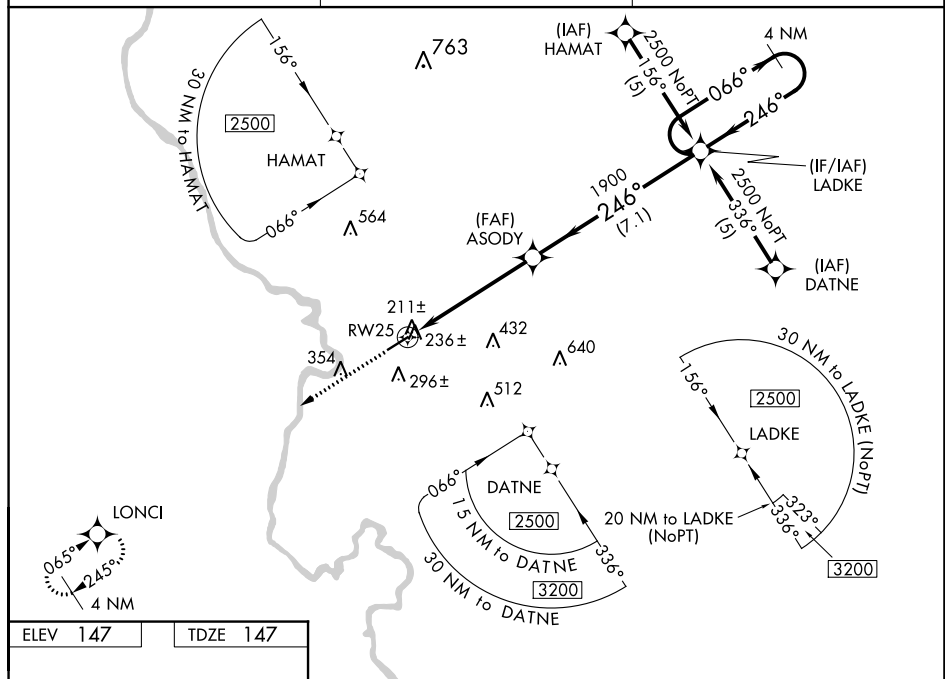

**LADKE VOR/DME Station Performance Data**

CATEGORY	A	B	C	D
LPV DA	441-1	294 (300-1)		
LNAV/VNAV DA	621-1 $\frac{3}{4}$	474 (500-1 $\frac{3}{4}$ )		
LNAV MDA	680-1	533 (600-1)	680-1 $\frac{1}{2}$ 533 (600-1 $\frac{1}{2}$ )	680-1 $\frac{3}{4}$ 533 (600-1 $\frac{3}{4}$ )

## RNAV (GPS) RWY 25