10 AUG 2023


WAAS CH 86708 W06A APP CRS Rwy Idg 5000 TDZE 657 Apt Elev 666

RNAV (GPS) RWY 6

DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Bloomington/Normal altimeter setting. When local altimeter setting not received, use Bloomington/Normal altimeter setting: increase LPV DA to 1138 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1399 feet and all visibilities 15 SM; increase LNAV/VNAV DA to 1399 feet and all visibilities 15 SM; increase LNAV/VNAV DA to 1399 feet and solventially 150 feet and Circling Cat C visibility 1/2 SM. Visibility reduction by helicopters NA.

MISSED APPROACH: Climb to 3000 direct KEJDO and hold.

EC-3, 13 JUL 2023 to 10 AUG 2023

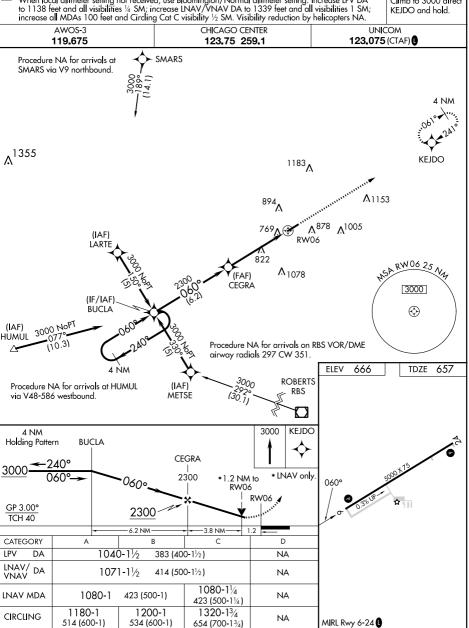

PONTIAC, ILLINOIS Orig-B 12AUG21 PONTIAC MUNI (PNT)
RNAV (GPS) RWY 6