


WAAS CH <b>86232</b> <b>W13A</b>	APP CRS <b>126°</b>	Rwy Idg <b>5601</b> TDZE <b>593</b> Apt Elev <b>595</b>
--	------------------------	---

RNAV (GPS) RWY 13  
SAN MARCOS RGNL (HYI)

RNP APCH-GPS. ⚠ Circling NA for Cat E southwest of Rwy 13-31. Inop table does not apply to LPV all Cats. ⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. For inop ALS, increase LNAV/VNAV Cat E visibility to 1 SM and LNAV Cat E visibility to 1½ SM.				MALS ⚠	MISSED APPROACH: Climb to 3000 direct HODAL and hold.
ATIS ★ <b>120.825</b>	AUSTIN APP CON <b>119.0 370.85</b>	SAN MARCOS TOWER★ <b>126.825</b> (CTAF) <b>0</b>	GND CON <b>120.125</b>	CLNC DEL <b>120.125</b>	CLNC DEL <b>121.35</b> (when twr closed)

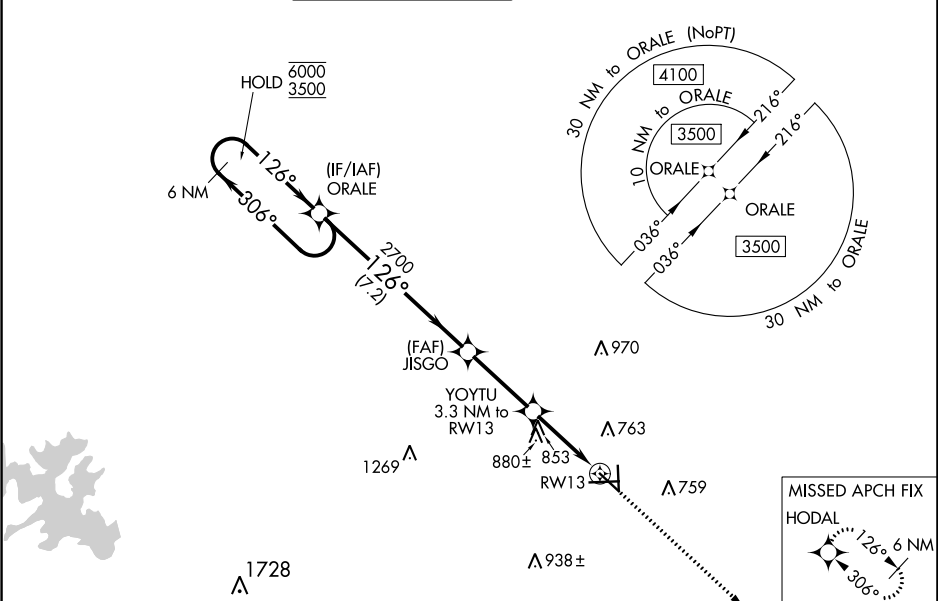

6 NM Holding Pattern		ORALE		JISGO		YOYTU 3.3 NM to RW13		1.5 NM to RW13		RW13		
6000 ← 306°		3500 → 126°		2700		1700		1700		1700		
GP 3.00°		TCH 57		7.2 NM		3.1 NM		1.8 NM		1.5 NM		
CATEGORY	A	B	C	D	E							
LPV DA	793-¾		200 (200-¾)									
LNAV/VNAV DA	946-¾		353 (400-¾)									
LNAV MDA	1120-¾	527 (600-¾)	1120-1¼		527 (600-1¼)							
CIRCLING	1120-1	525 (600-1)	1240-1¾	645 (700-1¾)	1320-2¼	725 (800-2¼)	1340-2¾	745 (800-2¾)				
MIRL Rwy 8-26, 13-31, and 17-35 REIL Rwy 8 and 26												