

RNAV (GPS) RWY 13L

AL-98 [USN]


CORPUS CHRISTI NAS (TRUAX FLD) (KNGP)

APCH CRS	Rwy Idg	5000
132°	TDZE	19
	Arpt Elev	19


RNP APCH - DME/DME RNP-0.3 NA.
▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15° C (5° F) or above 54° C (129° F).

MISSED APPROACH: Climb to 600, then climbing right turn to 1600 direct POLCK and hold.
--


ATIS ★ 127.9 290.9	CORPUS CHRISTI APP CON 128.675 343.75	NAVY CORPUS TOWER ★ 134.85 340.2	GND CON 118.7 257.85	CLNC DEL 314.3	ASR/ PAR
-----------------------	--	-------------------------------------	-------------------------	-------------------	-------------

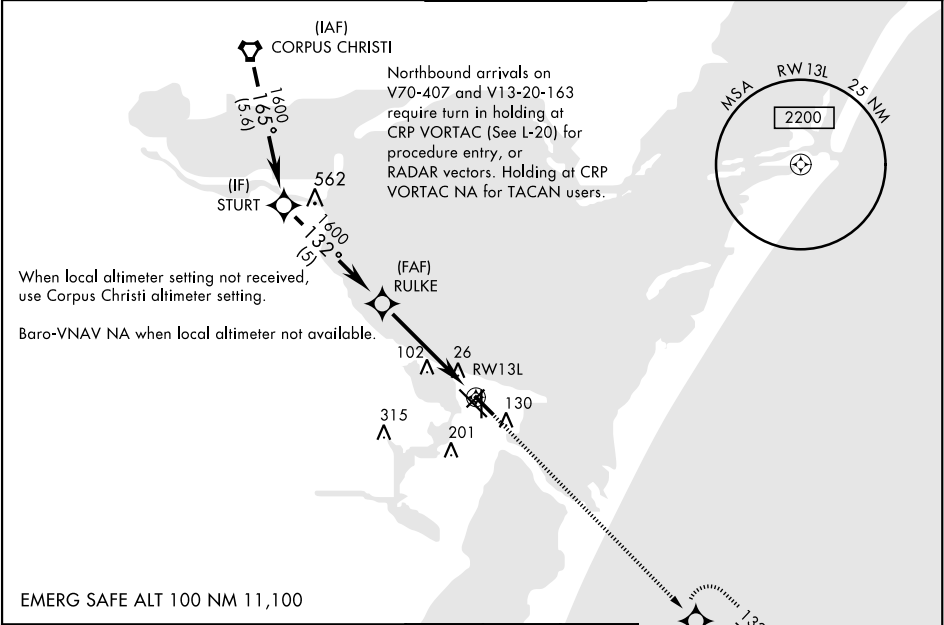

VDP NA when using Corpus Christi altimeter setting.	600	1600	POLCK
---	-----	------	-------

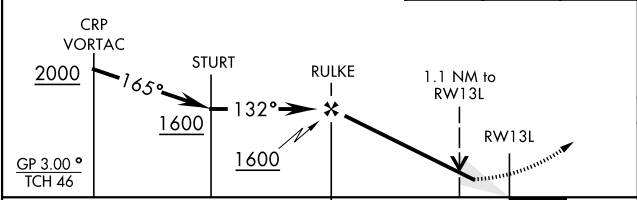

CATEGORY	A	B	C	D
LNAV/VNAV DA	269-¾	250	(300-¾)	
LNAV MDA	400-1	381 (400-1)	400-1½	381 (400-1½)
CIRCLING	480-1	461 (500-1)	540-1½ 521 (600-1½)	620-2 601 (700-2)
CORPUS CHRISTI ALTIMETER SETTING				
LNAV MDA	420-1	401 (500-1)	420-1½	401 (500-1½)
CIRCLING	500-1 481 (500-1)	520-1 501 (600-1)	580-1½ 561 (600-1½)	660-2 641 (700-2)

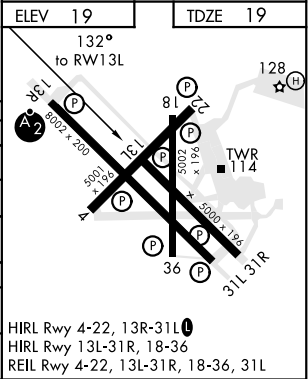

RNAV (GPS) RWY 13L