


WAAS CH 42805 W05A	APP CRS 051°	Rwy Idg TDZE 136 Apt Elev 142
--	------------------------	---

RNAV (GPS) RWY 5

LAKELAND LINDER INTL (LAL)

RNP APCH.	<p>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.</p> <p>▲ When local altimeter setting not received, use Plant City altimeter setting: increase LPV DA to 354 feet; increase LNAV/VNAV DA to 523 feet; increase all MDA 20 feet and LNAV Cat C/D visibility 1⁄8 SM. Baro-VNAV and VDP NA when using Plant City altimeter setting. Circling NA to Rwy 8, 26.</p>	MISSED APPROACH: Climb to 2000 direct OBTOQ and left turn on track 313° to PLUMY and hold.
-----------	--	--

ATIS 118.025	TAMPA APP CON 120.65 290.3	LAKELAND TOWER 124.5 236.775	GND CON 121.4
------------------------	--------------------------------------	--	-------------------------

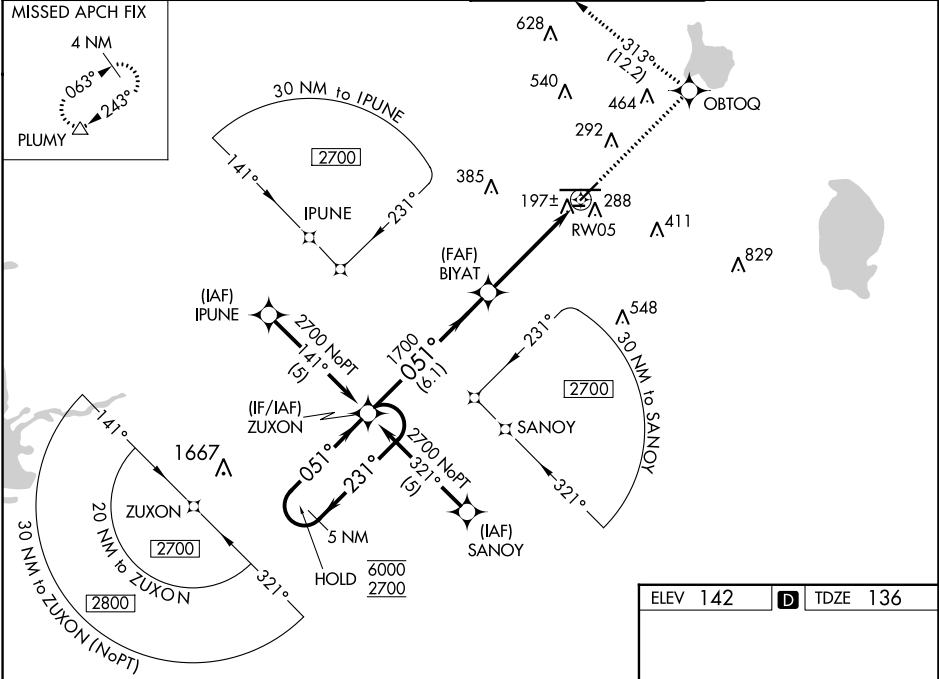

5 NM Holding Pattern		ZUXON		2000 ↑		OBTOQ ✦		PLUMY ↷ tr 313°		△	
6000 ← 231°		2700 → 051°		051°		1700		1.2 NM to RW05		RW05	
GP 3.00° TCH 56				6.1 NM		3.5 NM		1.2 NM			
CATEGORY	A	B	C	D							
LPV DA	336-3⁄4			200 (200-3⁄4)							
LNAV/ VNAV DA	505-1¼			369 (400-1¼)							
LNAV MDA	560-1 424 (500-1)		560-1¼ 424 (500-1¼)								
CIRCLING	600-1 458 (500-1)	660-1 518 (600-1)	720-1½ 578 (600-1½)	840-2¼ 698 (700-2¼)							