


WAAS CH <b>86706</b> <b>W23A</b>	APP CRS <b>231°</b>	Rwy Idg <b>5002</b> TDZE <b>191</b> Apt Elev <b>193</b>
--	------------------------	---

RNAV (GPS) RWY 23  
TRI CITIES EXEC/DINWIDDIE COUNTY (PTB)


**A** Baro-VNAV NA when using Richmond Exec/Chesterfield County altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Richmond Exec/Chesterfield County altimeter setting: increase LPV DA to 478 feet and LNAV/VNAV DA to 517 feet and all MDA 40 feet; increase LNAV/VNAV all Cats visibility and LNAV Cat C visibility ¼ mile, and increase Circling Cat C visibility ¼ mile.

**MISSED APPROACH:**  
Climb to 2000 direct  
FASOS and hold.

AWOS-3 <b>133,325</b>	POTOMAC APP CON <b>126.75 307.2</b>	GCO <b>135,075</b>	UNICOM <b>122.7 (CTAF) 0</b>
--------------------------	--	-----------------------	---------------------------------

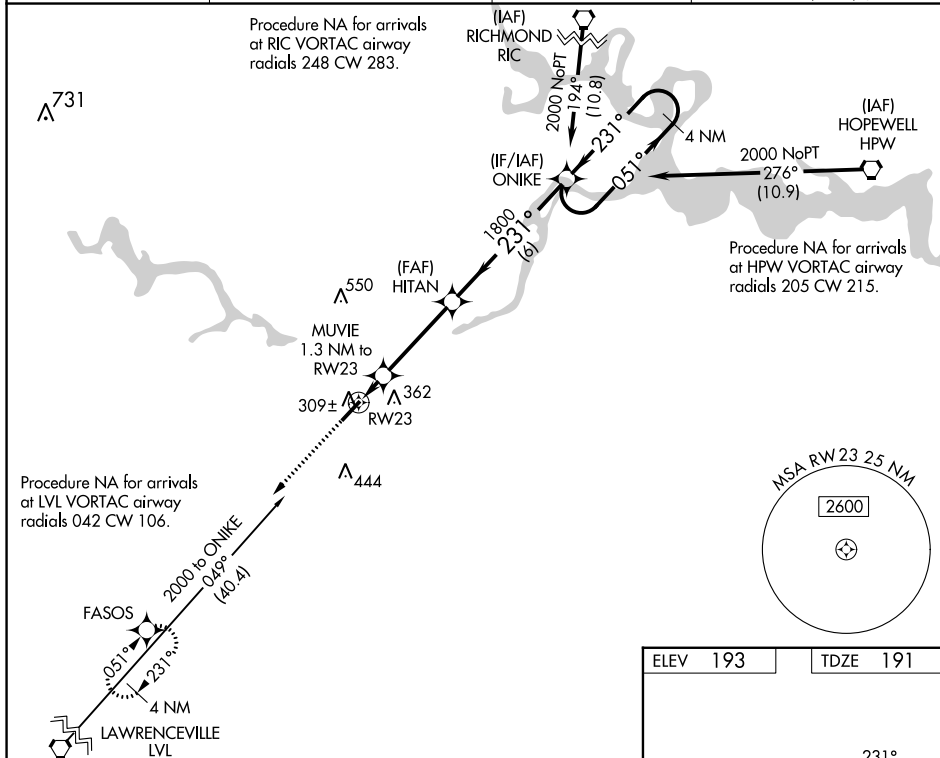

2000 ↑	FASOS 	HITAN 1800	ONIKE 231°	4 NM Holding Pattern 051° → 2000 ← 231°
*LNAV only RW23 1.3 NM to RW23	MUVIE 1.3 NM to RW23	640*	1800	GP 3.00 TCH 40
1.3 NM		3.6 NM	6 NM	
CATEGORY	A	B	C	D
LPV DA	441-1	250 (300-1)		NA
LNAV/ VNAV DA	480-1	289 (300-1)		NA
LNAV MDA	560-1	369 (400-1)		NA
<b>C</b> CIRCLING	680-1	487 (500-1)	760-1½ 567 (600-1½)	NA

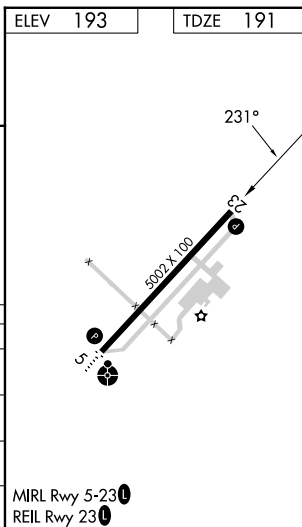

## RNAV (GPS) RWY 23