RNAV (GPS) RWY 1
WILKES COUNTY (UKF)

WAAS CH 40440 W01A	APP CRS 007°	Rwy ldg 6200 TDZE 1276 Apt Elev 1303

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hickory altimeter setting and increase LPV DA to 1566 feet and LNAV/VNAV DA to 1669 feet and LNAV/VNAV visibility all Cats ¼ SM. Increase all MDAs 100 feet and LNAV visibility Cats C/D ¼ SM and Circling Cat C ½ SM. For inop ALS when using Hickory altimeter setting, increase LPV all Cats visibility to 1 SM. VDP and Baro-VNAV NA when using Hickory altimeter setting.

MALSR

MISSED APPROACH: Climb to 1800 then climbing right turn to 5000 direct HAPRI and hold, continue climb-in-hold to 5000.

AWOS-3	ATLANTA CENTER	UNICOM
126.625	125.15 263.0	122.7 (CTAF) L

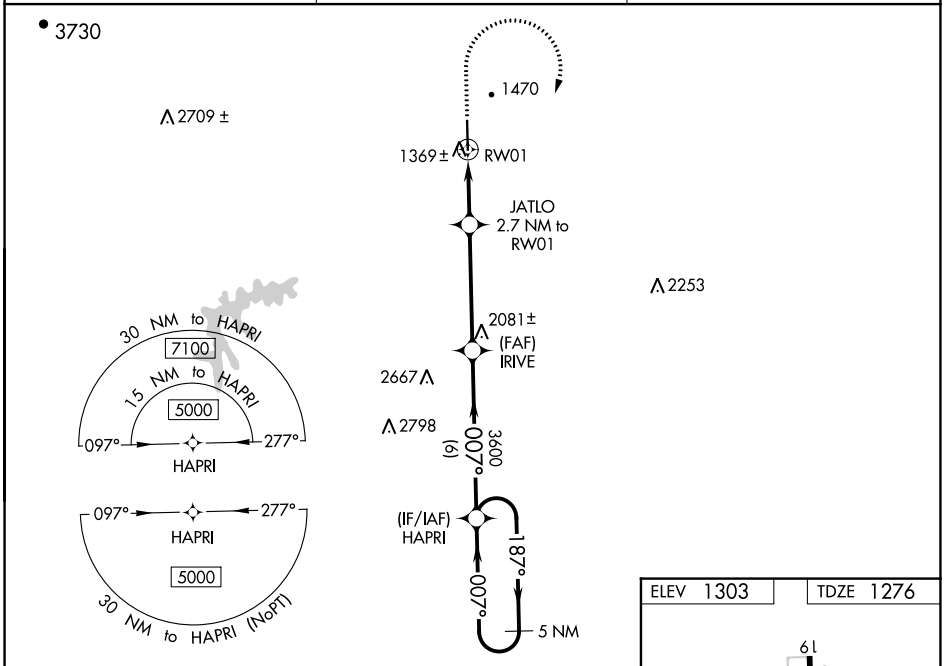

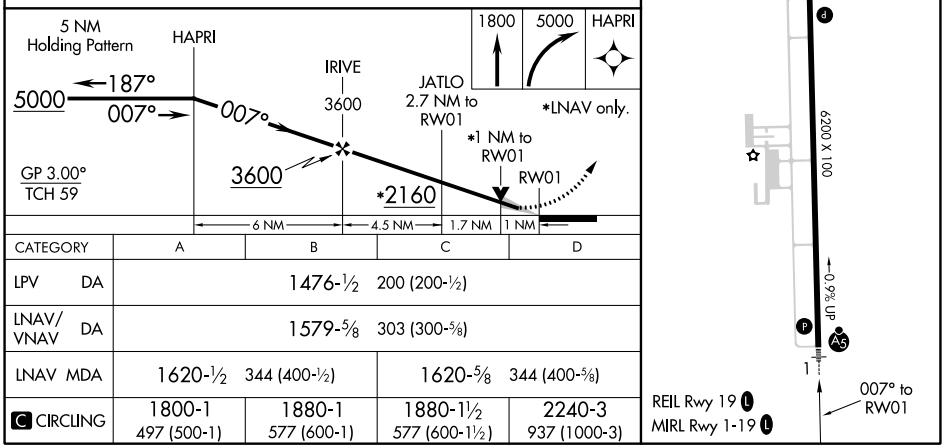

CATEGORY	A	B	C	D
LPV DA	1476-½ 200 (200-½)			
LNAV/VNAV DA	1579-⅝ 303 (300-⅝)			
LNAV MDA	1620-½ 344 (400-½)		1620-⅝ 344 (400-⅝)	
C CIRCLING	1800-1 497 (500-1)	1880-1 577 (600-1)	1880-1½ 577 (600-1½)	2240-3 937 (1000-3)

SE-2, 13 JUL 2023 to 10 AUG 2023