

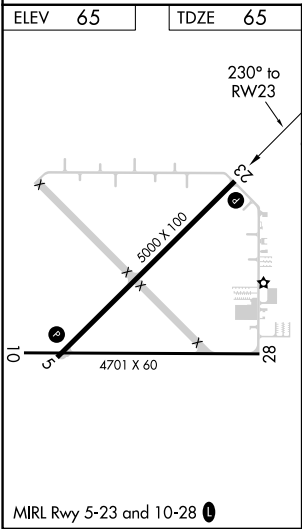
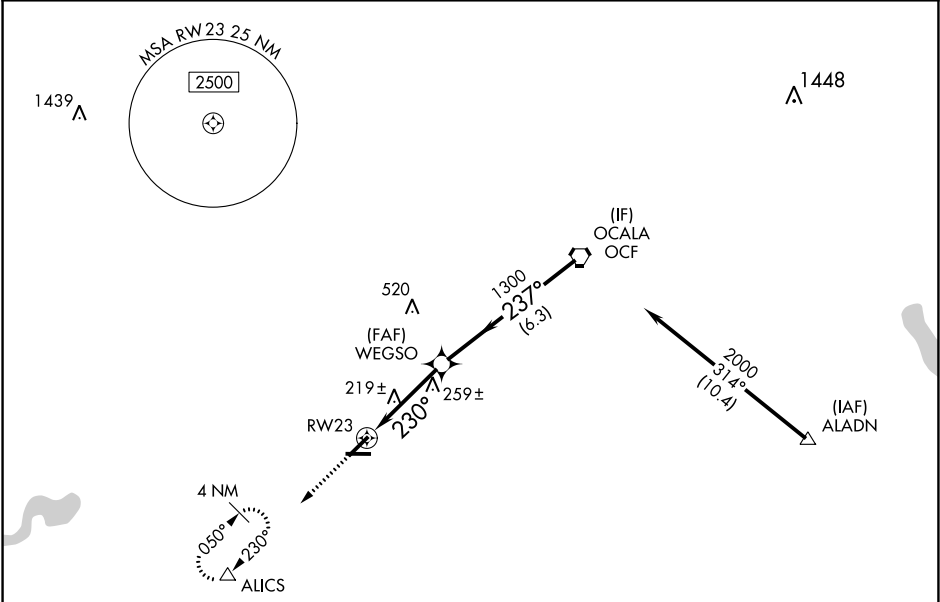
WAAS CH 48828 W23A	APP CRS 230°	Rwy Idg 5000 TDZE 65 Apt Elev 65
--	------------------------	---




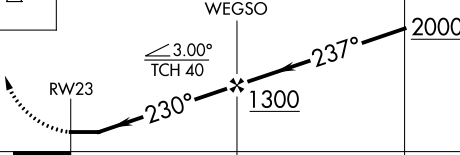
RNAV (GPS) RWY 23

MARION COUNTY (X35)

RNP APCH.	MISSED APPROACH: Climb to 3000 direct ALCIS and hold, continue climb-in-hold to 3000.
<div><div>▼</div><div>NA</div><div>Rwy 23 helicopter visibility reduction below 1 SM NA. Use Ocala altimeter setting; when not received, use Leesburg altimeter setting and increase all MDAs 60 feet, and increase LP and LNAV Cats C and D visibility ½ SM, and Circling Cat D ¼ SM. Procedure NA at night.</div></div>	

OCF AWOS-3PT 128.125	JACKSONVILLE APP CON 118.6 251.15	UNICOM 122.8 (CTAF) 0
--------------------------------	---	---------------------------------



				
3000 		ALICS 		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 27).
				
CATEGORY	A	B	C	D
LP MDA	500-1	435 (500-1)	500-1¼	435 (500-1¼)
LNAV MDA	540-1	475 (500-1)	540-1⅜	475 (500-1⅜)
CIRCLING	540-1 475 (500-1)	560-1 495 (500-1)	580-1½ 515 (600-1½)	760-2¼ 695 (700-2¼)