SC-4, 13 JUL 2023 to 10 AUG 2023




RNAV (GPS) RWY 1 KEY FLD (MEI)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C (18°F) or above 54°C (130°F). Circling NA southeast of Rwys 1 and 22. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Hattiesburg/Laurel Rgnl altimeter setting and increase all DA 138 feet and all MDA 140 feet, LPV all Cats visibility to RVR 3100 LNAV/VNAV all Cats and LNAV Cats C, D, and E visibilities to 1% mile, and Circling Cat C visibility ½ mile and Cat D visibility ¼ mile. For inop MALSR increase LPV Cat E to RVR 4000, LNAV/VNAV Cat E visibility to RVR 6000, and LNAV Cat E visibility to 1% mile. For inop MALSR when using Hattiesburg/Laurel Rgnl altimeter setting, increase LPV all Cats visibility to RVR 5000, LNAV/VNAV Cat E visibility to 1% mile, and LNAV Cat E visibility to 13/4 mile. VDP and Baro-VNAV NA when using Hattiesburg/Laurel Rgnl altimeter setting. Night landing: Rwy 22 NA. \*\* RVR 1800 authorized with use of FD or AP or HUD to DA, NA when using Hattiesburg/Laurel Rgnl altimeter setting.



MISSED APPROACH Climb to 800 then climbing left turn to 3000 direct PAULD and hold.

MERIDIAN APP CON★ ATIS KEY TOWER ★ GND CON CINC DEL UNICOM 126.475 291.675 120.5 269.325 133.975 (CTAF) 0 257.8 121.9 348.6 121.9 348.6 122,95

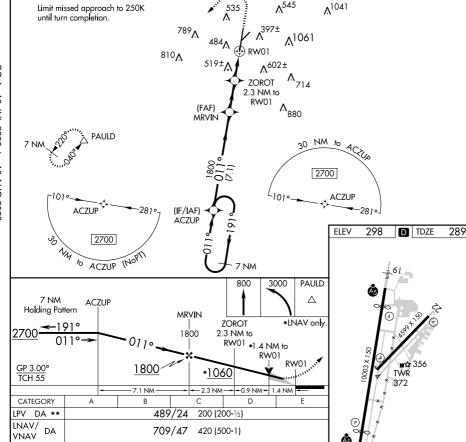

MERIDIAN, MISSISSIPPI Amdt 3C 07DEC17

780/24 491 (500-1/2)

880-1

860-1

562 (600-1)

LNAV MDA

**C** CIRCLING

32°20′N-88°45′W

582 (600-1) |662 (700-134) |822 (900-234) | 822 (900-3)

960-13/4

780/50 491 (500-1)

1120-23/4

RNAV (GPS) RWY 1

MIRL Rwy 4-22 (

HIRL Rwy 1-19 (

011° to

RW01