

WAA5	APP CRS	Rwy Idg	6307
CH 42833	201°	TDZE	4970
W20A		Apt Elev	4970


RNAV (GPS) RWY 20

CLAYTON MUNI AIRPARK (CAO)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 54°C (130°F). Circling NA west of Rwy 2-20. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Dalhart altimeter setting and increase all DA 227 feet and all MDA 240 feet, increase LPV all Cats visibility 7⁄8 mile, increase LNAV/VNAV all Cats visibility 3⁄4 mile, increase LNAV Cat C visibility 5⁄8 mile, and increase circling Cat C visibility 1⁄4 mile. Baro-VNAV and VDP NA when using Dalhart altimeter setting.

MISSED APPROACH: Climb to 8000 direct CACAV and hold, continue climb-in-hold to 8000.

ASOS 120.625	ALBUQUERQUE CENTER 127.85 285.475	UNICOM 122.8 (CTAF) 0
-----------------	--------------------------------------	---------------------------------

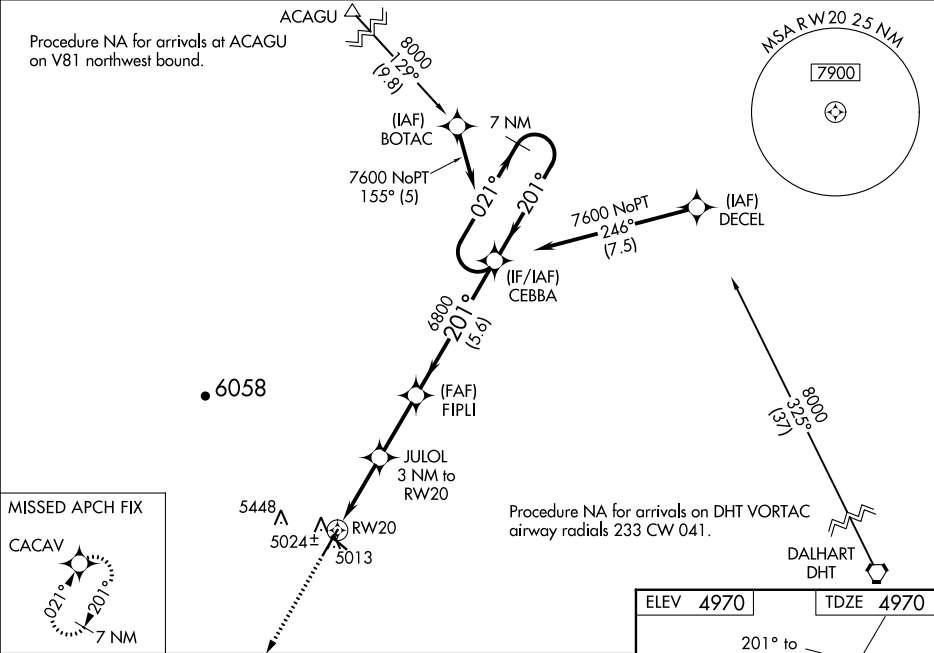

8000 CACAV		CEBBA		7 NM Holding Pattern	
*LNAV only.		FIPLI		021° → 7600	
*1.1 NM to RW20		JULOL 3 NM to RW20		← 201°	
RW20		5960*		GP 3.00° TCH 49	
-1.1		1.9 NM		2.6 NM	
5.6 NM					
CATEGORY	A	B	C	D	
LPV DA	5220-3⁄4	250 (300-3⁄4)		NA	
LNAV/VNAV DA	5300-1 1⁄8	330 (400-1 1⁄8)		NA	
LNAV MDA	5360-1	390 (400-1)	5360-1 1⁄8 390 (400-1 1⁄8)	NA	
CIRCLING	5360-1 390 (400-1)	5420-1 450 (500-1)	5420-1 1⁄2 450 (500-1 1⁄2)	NA	

