Rwy Idg 10506 APP CRS TDZE 092° Apt Elev

RNAV (RNP) Y RWY 8R MIAMI INTL(MIA)

For uncompensated Baro-VNAV systems, procedure NA below 6°C (43°F) or above 54°C (130°F). GPS required. For inop MALSR, increase RNP 0.11 all Cats visibility to 1½ mile. *Missed approach requires minimum climb of 330 feet per NM to 600

MISSED APPROACH: Climb to 3000 MALSR direct EWKIF and on track 127° to VKZ VOR/DME and hold, continue $\overline{\mathbb{A}_{5}}$ climb-in-hold to 3000.

1049

D-ATIS MIAMI APP CON ARR 119.15 124.85 322.3 DEP 133.675

MIAMI TOWER 118.3 256.9

GND CON 121.8 (8L/8R/12/26L/26R) 127.5 (9/27/30)


CLNC DEL 348.6 135.35


CPDLC

1049

Procedure NA for arrivals

at WORPP on V529 northwest bound, V35 westbound.

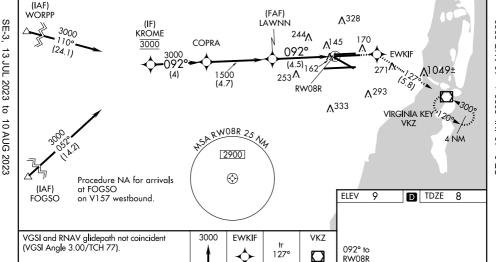



143 -

REIL Rwys 8L and 26R HIRL all Rwys MIAMI INTL (MTA)

TDZ/CL Rwy 8R