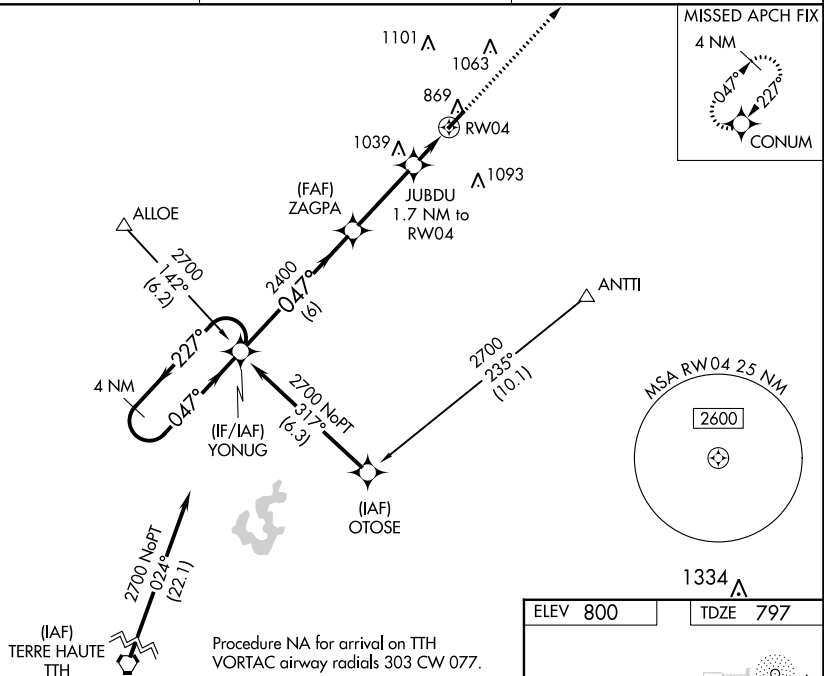


RNAV (GPS) RWY 4
CRAWFORDSVILLE RGNL (CFJ)

Baro-VNAV NA when using Greencastle altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use Greencastle altimeter setting: increase LPV DA to 1128 feet and all visibilities ¼ SM, LNAV/VNAV DA to 1118 feet and all visibilities ¼ SM; increase all MDA 60 feet and Circling Cats C and D visibilities ¼ SM. Rwy 4 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:
Climb to 2700 direct
CONUM and hold.

UNICOM
122.8 (CTAF) **L**

4 NM Holding Pattern

VGSJ and RNAV glidepath not coincident (VGSJ Angle 3.00/TCH 41).

2700

CONUM

YONUG

ZAGPA

JUBDU 1.7 NM to RW04

2700 ← 227°

047° →

047°


2400


*1380

GP 3.00° TCH 50

RW04

*LNAV only.

CATEGORY	A	B	C	D
LPV DA		1076-7 $\frac{5}{8}$	279 (300-%)	
LNAP/ VNAV DA		1066-7 $\frac{5}{8}$	269 (300-%)	
LNAP MDA	1240-1	443 (500-1)	1240-1 $\frac{3}{8}$	443 (500-1 $\frac{3}{8}$)
 CIRCLING	1240-1 440 (500-1)	1260-1 460 (500-1)	1440-1 $\frac{3}{4}$ 640 (700-1 $\frac{3}{4}$)	1520-2 $\frac{1}{4}$ 720 (800-2 $\frac{1}{4}$)

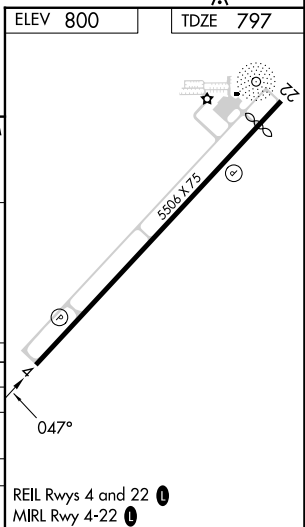

EC-2. 13 JUL 2023 to 10 AUG 2023