


WAAS CH 77801 W21A	APP CRS 216°	Rwy Idg TDZE 1221 Apt Elev 1221
--	------------------------	---

RNAV (GPS) RWY 21
BIG SANDY RGNL (SJS)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Circling to Rwy 3 NA at night. When local altimeter setting not received, use Jackson altimeter setting and increase all DA 101 feet and all MDA 120 feet; increase LPV all Cats visibility ¼ mile, increase LNAV/VNAV all Cats and LNAV Cats C/D visibilities ⅓ mile, and increase Circling Cat C visibility ½ mile, Cat D visibility ¼ mile. Baro-VNAV and VDP NA when using Jackson altimeter setting.

MISSED APPROACH:
Climb to 4300 direct KAPLE and hold.

AWOS-3 120.175	HUNTINGTON APP CON 119.75 270.1	UNICOM 123.05 (CTAF) 0
--------------------------	---	----------------------------------

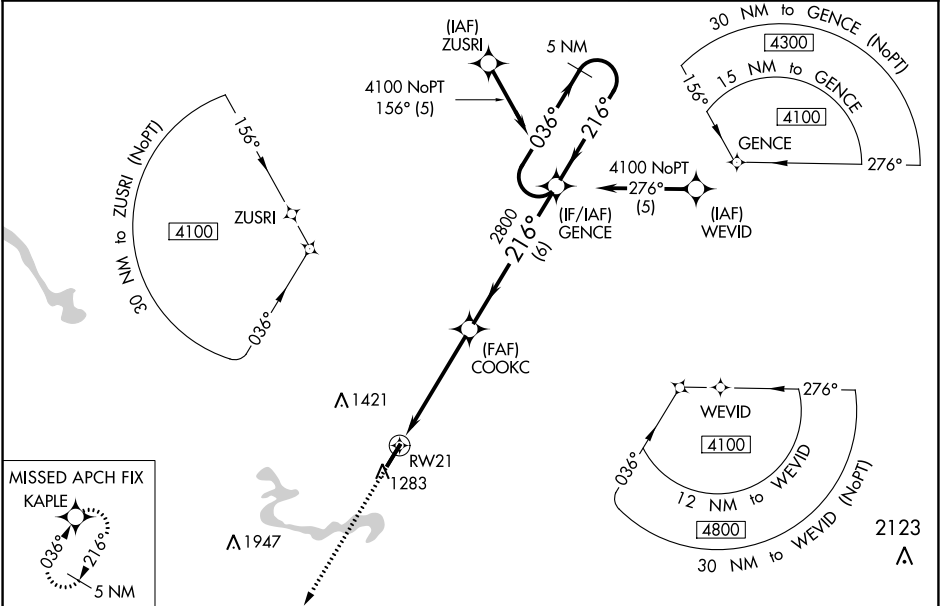

ELEV 1221	TDZE 1221	216° to RW21			
		4300	KAPLE	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 27).	
		* LNAV only.		5 NM Holding Pattern	
		COOKC 2800		GENGE 4100	
		RW21 1283		GP 3.00° TCH 40	
CATEGORY		A	B	C	D
LPV DA		1471-¾		250 (300-¾)	
LNAV/VNAV DA		1739-1⅓		518 (600-1⅓)	
LNAV MDA		1700-1	479 (500-1)	1700-1⅓	479 (500-1⅓)
CIRCLING		1760-1	539 (600-1)	1920-2 699 (700-2)	2060-2¾ 839 (900-2¾)