

# RNAV (GPS) RWY 10

## BEAR LAKE COUNTY (1U7)

When local altimeter setting not received, procedure NA.

**MISSED APPROACH:** (Do not exceed 185K until FIROS)  
Climb to 6340 then climbing right turn to 11000 direct  
FIROS and hold.

SALT LAKE CENTER  
128.35 239.25

UNICOM  
122.8 (CTAF) **L**


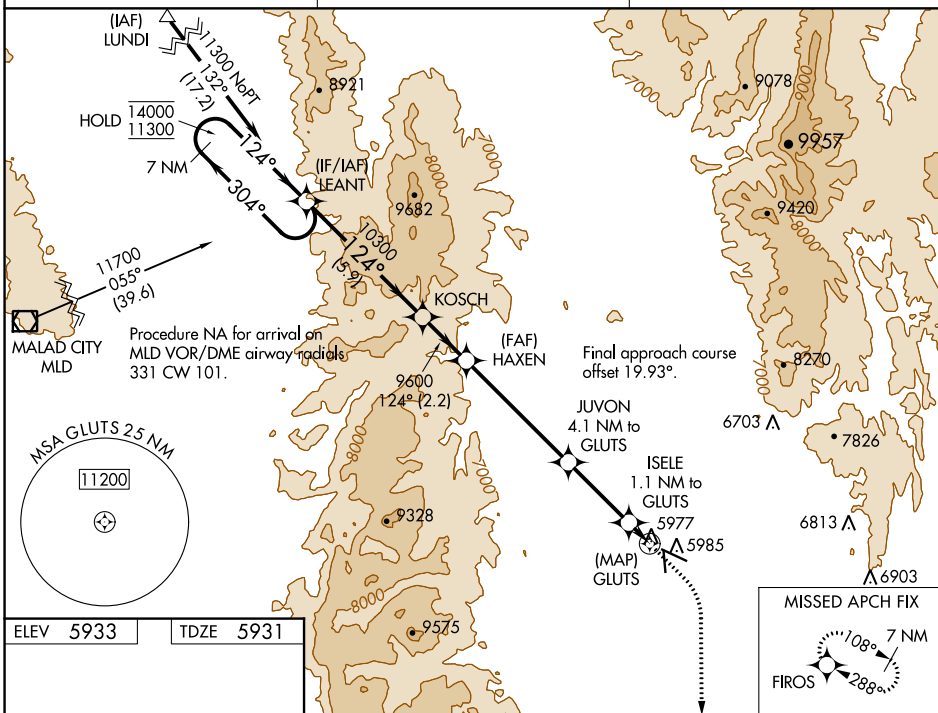


Diagram illustrating a missed APCH FIX. The diagram shows a compass rose with a heading of 108° and a distance of 7 NM. The text "FIROS" is visible.



MIRL Rwy 10-28 **L**  
REIL Rwy 10 and 28 **L**

|  |                       |                       |                         |  |                         |   |
|--|-----------------------|-----------------------|-------------------------|--|-------------------------|---|
| <div>7 NM Holding Pattern</div> <div>LEANT</div> <div>KOSCH</div> <div>HAXEN</div> <div>JUVON<br/>4.1 NM to GLUTS</div> <div>ISELE<br/>1.1 NM to GLUTS</div> <div>GLUTS</div> <div>FIROS</div>   |                       |                       |                         |  |                         |   |
| <div>14000 ← 304°</div> <div>11300 124° →</div> <div>124°</div> <div>10300</div> <div>9600</div> <div>7680</div> <div>6540</div> <div>3.50°</div> <div>TCH 45</div> <div>5.9 NM</div> <div>2.2 NM</div> <div>5.2 NM</div> <div>3.1 NM</div> <div>1.1 NM</div> <div>0.5</div> |                       |                       |                         |  |                         |   |
| CATEGORY   | A                     |                       | B                       |  | C                       | D |
| LP MDA   | 6240-1                |                       | 309 (400-1)             |  |                         |   |
| RNAV MDA   | 6260-1                |                       | 329 (400-1)             |  |                         |   |
| <b>C</b> CIRCLING  | 6320-1<br>387 (400-1) | 6400-1<br>467 (500-1) | 6720-2¼<br>787 (800-2¼) |  | 7140-3<br>1207 (1300-3) |   |

RNAV (GPS) RWY 10