

APP CRS
320°

Rwy Idg
TDZE
7278
Apt Elev
793


RNAV (RNP) Z RWY 32
INDIANAPOLIS INTL (IND)

For uncompensated Baro-VNAV systems, procedure
NA below -18°C (2°F) or above 54°C (130°F).
GPS required.

MALSR

MISSED APPROACH: Climb to
3000 on track 320° to KEADY
and hold.

D-ATIS 134.25	INDIANAPOLIS APP CON 128.175 317.8	INDY TOWER 120.9 257.8	GND CON 121.9	CLNC DEL 128.75 257.8	CPDLC
-------------------------	--	----------------------------------	-------------------------	---------------------------------	-------

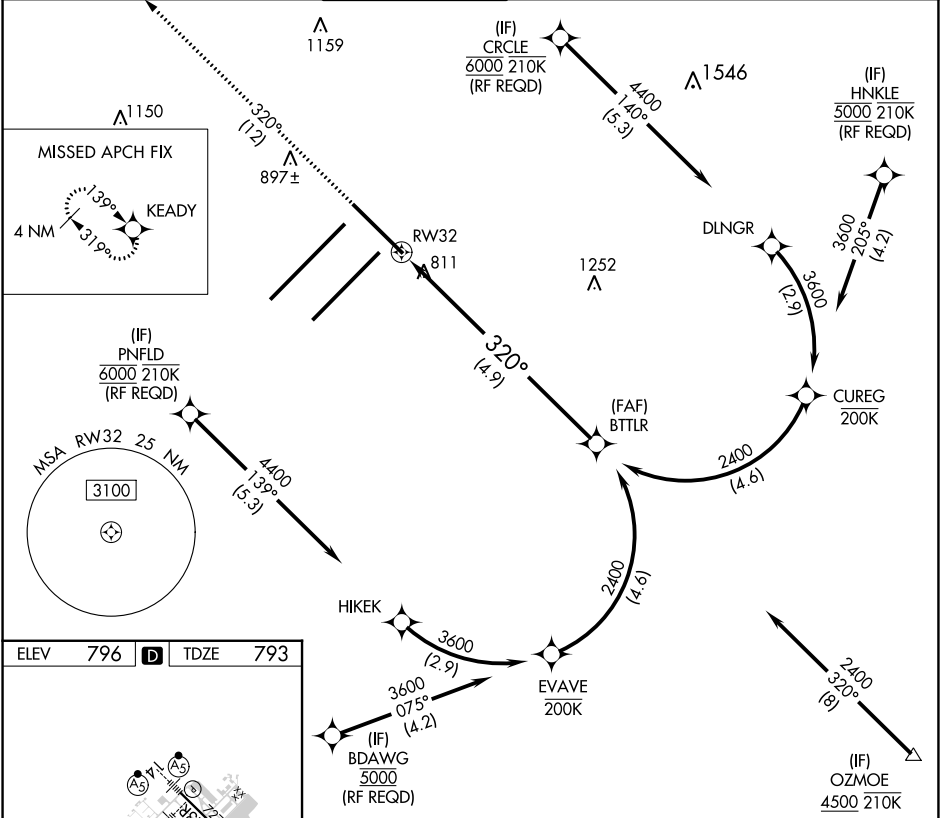

ELEV 796 **D** TDZE 793

3000 KEADY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 73).

BTTLR 2400

GP 3.00° TCH 53

See planview for multiple IF locations.

4.9 NM

See planview for multiple IF locations.

CATEGORY	A	B	C	D
RNP 0.19 DA		1134/30	341 (400-%)	
RNP 0.30 DA		1196/45	403 (400-%)	

AUTHORIZATION REQUIRED