


WAAS CH <b>93801</b> <b>W18A</b>	APP CRS <b>182°</b>	Rwy Idg TDZE Apt Elev	<b>7152</b> <b>1908</b> <b>1919</b>
--	------------------------	-----------------------------	---

**RNAV (GPS) RWY 18**  
SAN ANGELO RGNL/MATHIS FLD (SJT)

RNP APCH - GPS.	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -8°C or above 54°C. Circling NA for Cat E west of Rwy 18-36.	MISSED APPROACH: Climb to 4400 direct HUMUG and on track 232° to HEXPE and hold.
-----------------	---	--

ATIS <b>128.45 319.0</b>	SAN ANGELO APP CON ★ <b>125.35 354.1</b>	MATHIS TOWER ★ <b>118.3(CTAF) 284.7</b>	GND CON <b>121.9 348.6</b>	UNICOM <b>122.95</b>
-----------------------------	---	--	-------------------------------	-------------------------

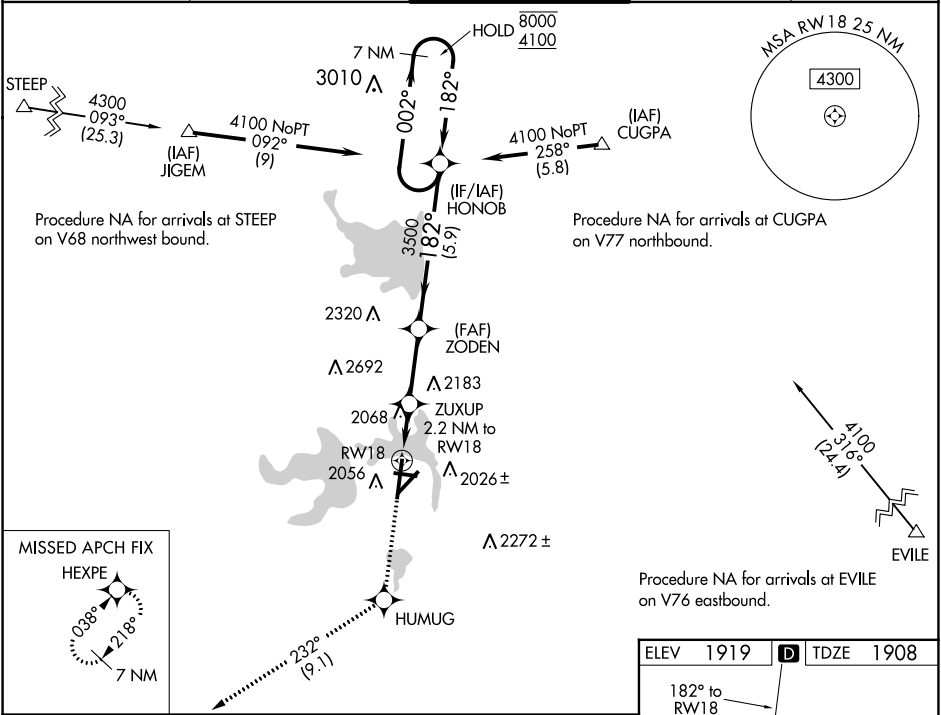

4400	HUMUG	tr 232°	HEXPE	HONOB	7 NM Holding Pattern
*LNAV only	ZUXUP 2.2 NM to RW18	ZODEN	3500	182°	8000 4100
	*1.2 NM to RW18		*2640	3500	GP 3.00° TCH 45
	1.2 NM	1 NM	2.7 NM	5.9 NM	
CATEGORY	A	B	C	D	E
LPV DA		2158-3/4	250 (300-3/4)		
LNAV/VNAV DA		2246-1	338 (400-1)		
LNAV MDA	2340-1	432 (500-1)	2340-1 1/8	432 (500-1 1/8)	
CIRCLING	2360-1 441 (500-1)	2380-1 461 (500-1)	2500-1 1/2 581 (600-1 1/2)	2700-2 1/2 781 (800-2 1/2)	2700-2 3/4 781 (800-2 3/4)

