

WAAS CH <b>72830</b> <b>W35A</b>	APP CRS <b>356°</b>	Rwy Idg TDZE Apt Elev	<b>5759</b> <b>36</b> <b>36</b>
--	------------------------	-----------------------------	---------------------------------------


RNAV (GPS) RWY 35R  
VALLEY INTL (HRL)

VALLFY INTL (HRL)

**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Port Isabel altimeter setting: increase all DAs to 328 feet and all visibilities 1/8 SM; increase all MDAs 60 feet and visibility Cats C and D 1/4 SM. Baro-VNAV and VDP NA with Port Isabel altimeter setting.

**MISSED APPROACH:**  
Climb to 2000 direct  
BETVE and hold.

ATIS <b>124.85</b>	VALLEY APP CON <b>120.7 279.5</b>	HARLINGEN TOWER ★ <b>119.3 (CTAF) L 317.6</b>	GND CON <b>121.7</b>	UNICOM <b>122.95</b>
-----------------------	--------------------------------------	--	-------------------------	-------------------------

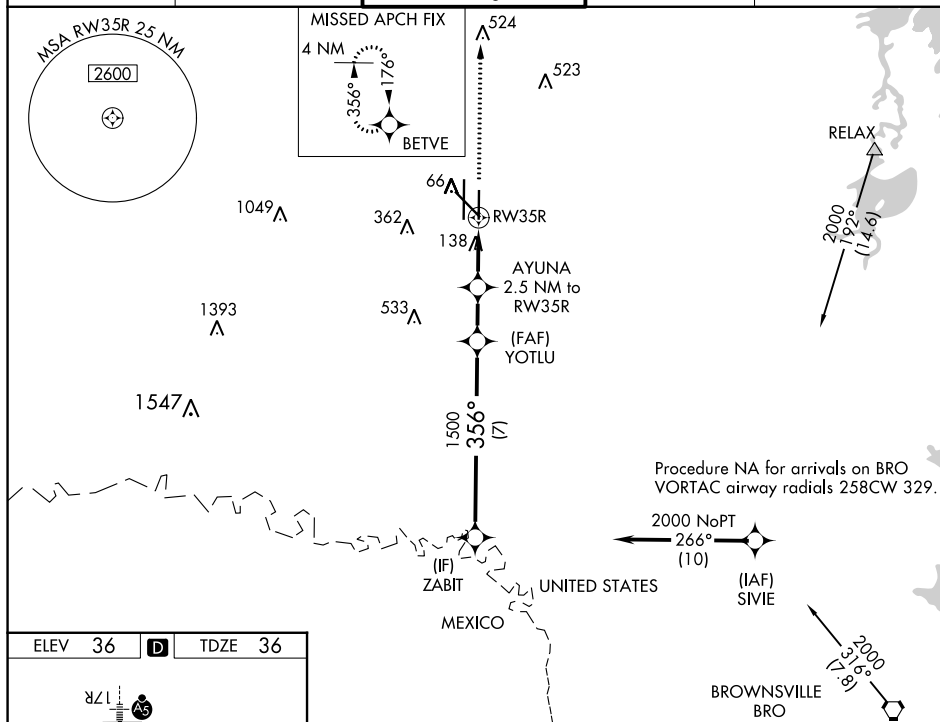

ELEV	36	<b>D</b>	TDZE	36
------	----	----------	------	----

