APP CRS	Rwy ldg	11014
063°	TDZE	256
	Apt Elev	298

RNAV (RNP) Z RWY 6L

GUAM INTL (GUM)(PGUM)

For uncompensated Baro-VNAV systems, procedure NA below 19°C (66°F) or above 48°C (119°F). GPS required. For inoperative MALSR, increase RNP 0.30* visibility to 1 mile and RNP 0.30 visibility to 1½ mile.
*Missed approach requires a minimum climb of 276 feet per NM to 1400.

MALSR

MISSED APPROACH: Climb to 3000 via track 063° to WABOX and hold.

ATIS	GUAM CERAP	AGANA TOWER	GND CON	CLNC DEL
119.0	119.8 269.0	118.1 340.2	121.9 336.4	121.9

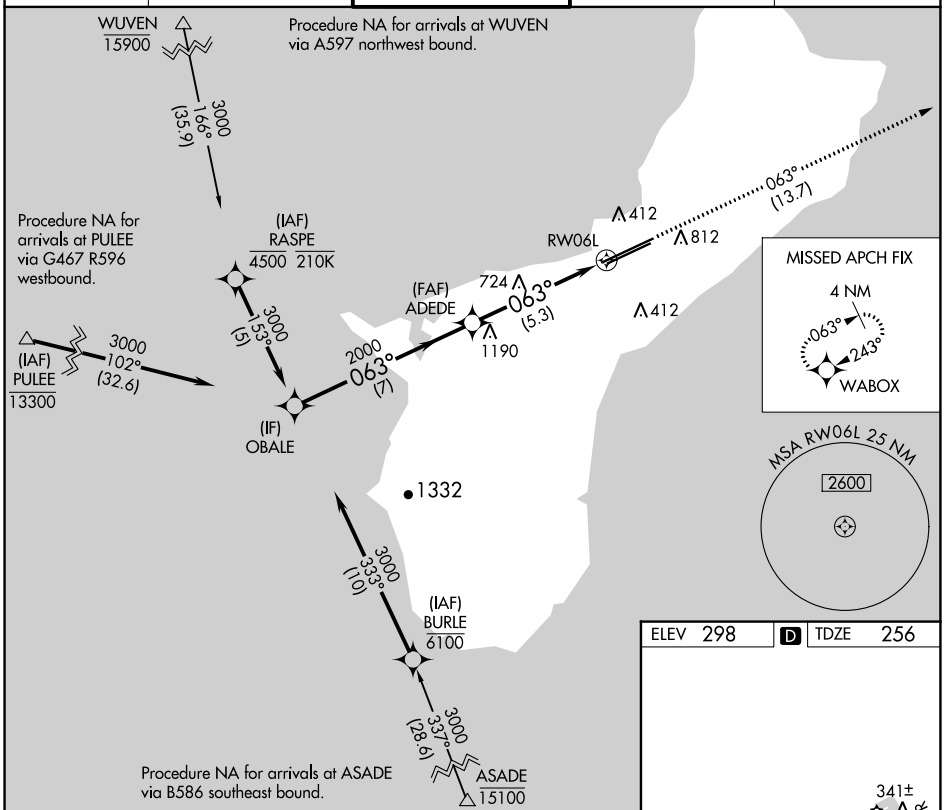

PAC, 15 JUN 2023 to 10 AUG 2023

PAC, 15 JUN 2023 to 10 AUG 2023

ELEV 298 D TDZE 256

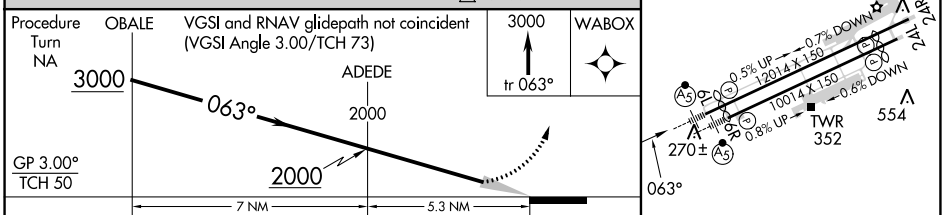



CATEGORY	A	B	C	D
RNP 0.30* DA	511-½ 255 (300-½)			
RNP 0.30 DA	656-1 400 (400-1)			

AUTHORIZATION REQUIRED

HIRL all Rwys