WAAS CH 77825 W04A	APP CRS 044°	Rwy ldg 6001 TDZE 279 Apt Elev 279

RNAV (GPS) RWY 4
WALNUT RIDGE RGNL (ARG)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV Cat C/D visibility to 1⅛ SM. Inop table does not apply to LPV and LNAV/VNAV all Cats.

MALSF

MISSED APPROACH: Climb to 2700 direct ESEGE and hold.

AWOS-3PT	MEMPHIS CENTER	UNICOM
126.525	120.075 289.4	122.8 (CTAF) L

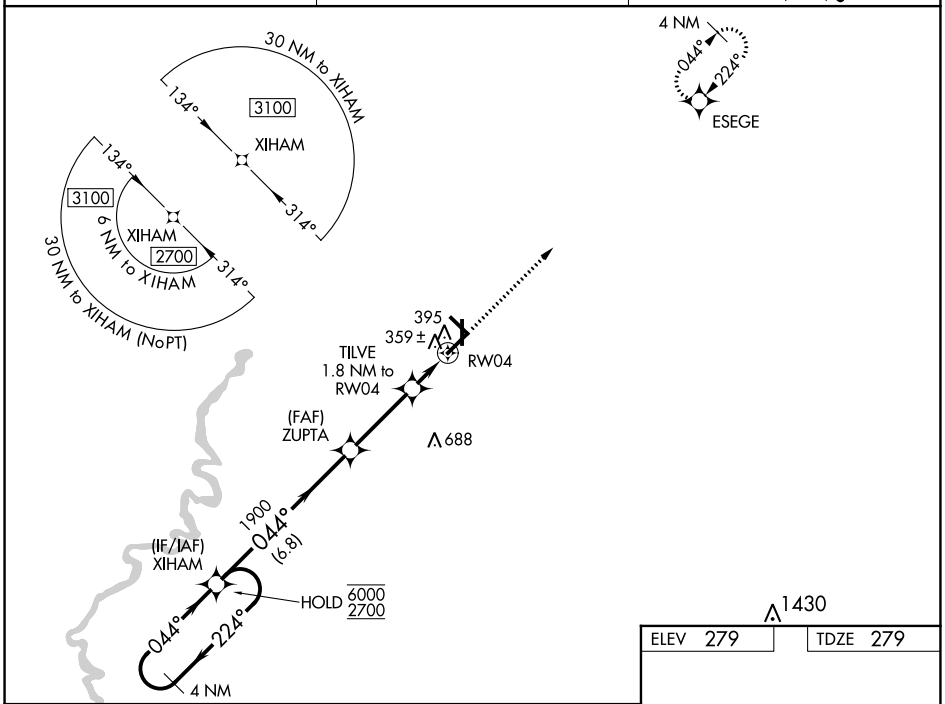

ELEV 279	TDZE 279

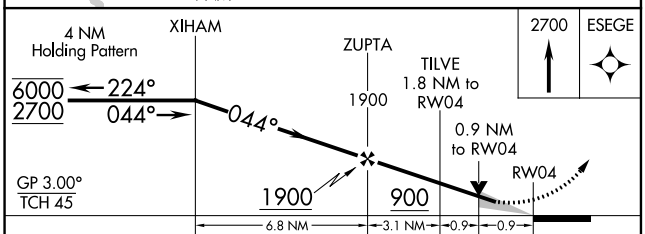

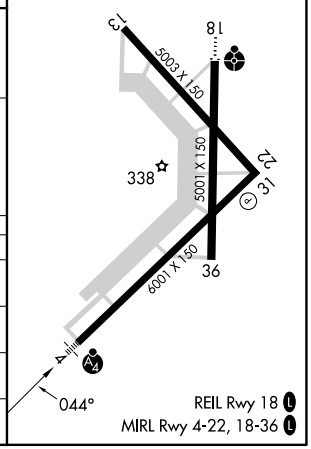

CATEGORY	A	B	C	D
LPV DA	529- ¾ 250 (300- ¾)			
LNAV/VNAV DA	529- ¾ 250 (300- ¾)			
LNAV MDA	620- ¾ 341 (400- ¾)			
C CIRCLING	840-1 561 (600-1)		840-1½ 561 (600-1½)	1000-2¼ 721 (800-2¼)

SC-1, 13 JUL 2023 to 10 AUG 2023
SC-1, 13 JUL 2023 to 10 AUG 2023