


WAAS CH <b>49035</b> <b>W27A</b>	APP CRS <b>273°</b>	Rwy Idg <b>3499</b> TDZE <b>1198</b> Apt Elev <b>1198</b>
--	------------------------	---

# RNAV (GPS) RWY 27


**▼** Baro-VNAV NA when using Akron-Canton Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. **▲** When local altimeter setting not received, use Akron-Canton Rgnl altimeter setting and increase all DA 50 feet and all MDA 60 feet; increase LPV all Cats visibility ½ mile, LNAV/VNAV all Cats visibility ¼ mile and Circling Cat C visibility ¼ mile. Helicopter visibility reduction below 1 SM NA. Night landing Cat C: Procedure NA.

**MISSED APPROACH:**  
Climb to 4000 direct  
JWWEB and hold.

AWOS-3 <b>118.675</b>	CLEVELAND APP CON★ <b>118.6 371.875</b>	CLNC DEL <b>125.65</b>	UNICOM <b>123.05 (CTAF) ①</b>
--------------------------	--	---------------------------	----------------------------------

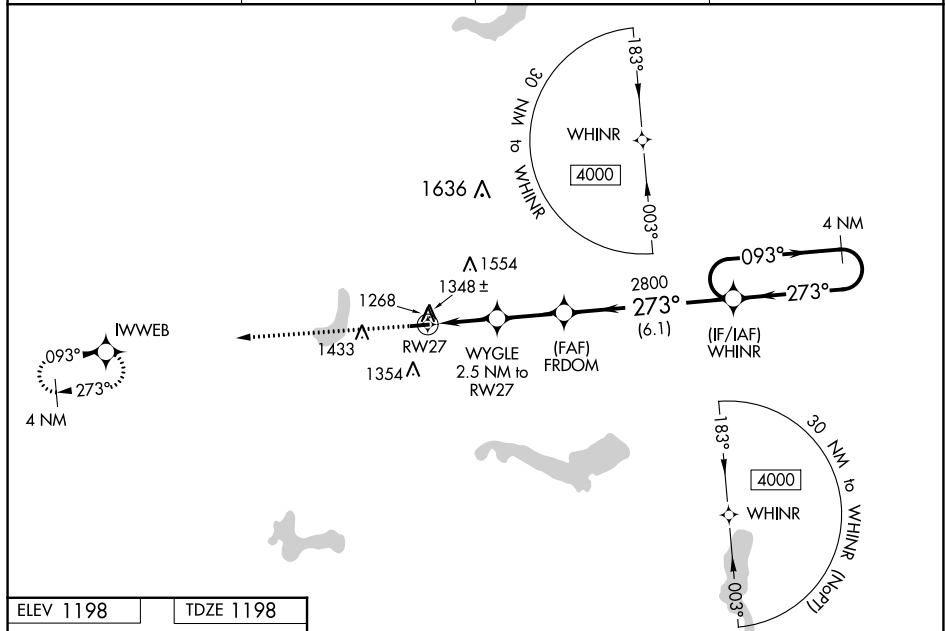

ELEV 1198		TDZE 1198
-----------	--	-----------

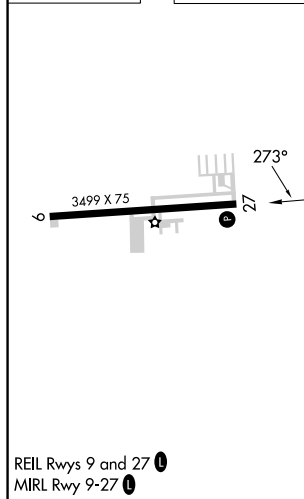[illegible]