

WAAS CH 48915 W36A	APP CRS 005°	Rwy Idg 5001 TDZE 458 Apt Elev 458
--	------------------------	---

RNAV (GPS) RWY 36


PHILADELPHIA MUNI (MPPE)

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 48°C (118°F). DME/DME RNP-0.3 NA. Visibility reduction by helicopters NA. When local altimeter setting not received, use Key Fld altimeter setting and increase all DA 101 feet and all MDA 120 feet and increase LPV, LNAV/VNAV all Cats, LNAV Cats C and D visibility ½ mile, increase Circling Cats C and D visibility ¼ mile. Baro-VNAV and VDP NA when using Key Fld altimeter setting.

MISSED APPROACH:
Climb to 3000 direct
WADIS and hold.

AWOS-3P 118.725	MEMPHIS CENTER 132.75 350.25	UNICOM 123.0 (CTAF)
---------------------------	--	-------------------------------

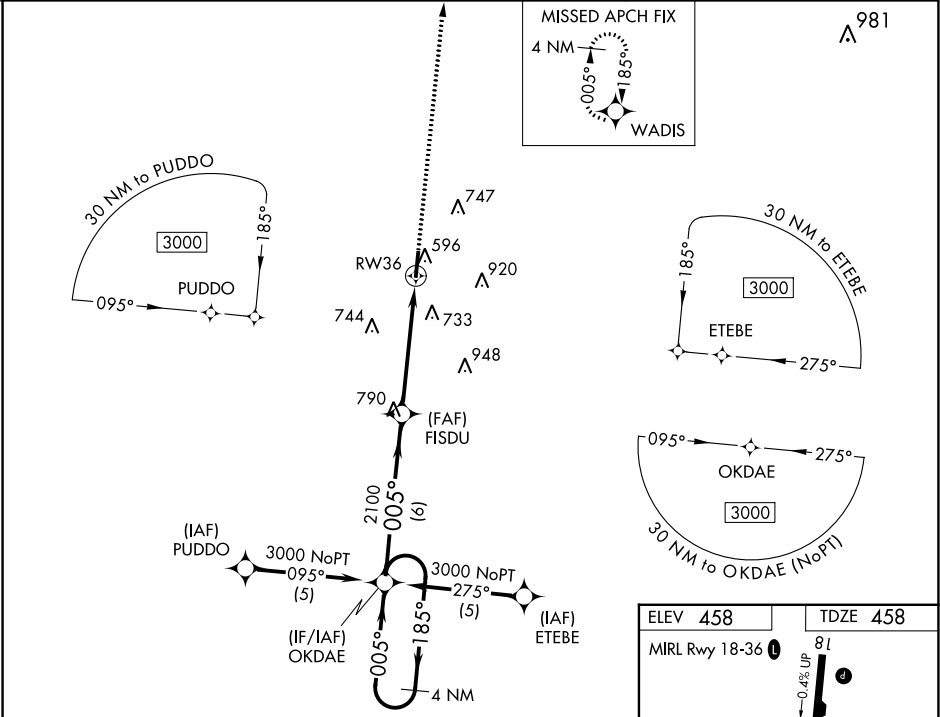

4 NM Holding Pattern OKDAE		3000 WADIS	
3000 ← 185°		005° →	
GP 3.00° TCH 42		005°	
2100		*1.7 NM to RW36	
6 NM		3.3 NM	
1.7 NM		*LNAV only.	
CATEGORY	A	B	C
LPV DA	838-1¼		380 (400-1¼)
LNAV/VNAV DA	1107-2¼		649 (700-2¼)
LNAV MDA	1040-1	582 (600-1)	1040-1½ 582 (600-1½)
CIRCLING	1060-1	602 (700-1)	1280-2½ 822 (900-2½)

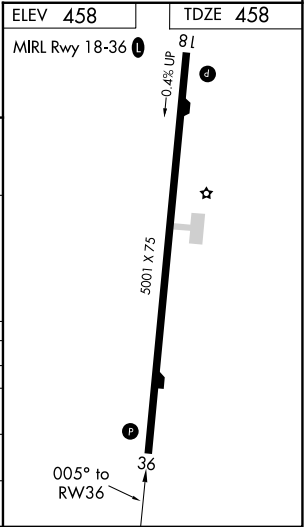

SC-4, 13 JUL 2023 to 10 AUG 2023

SC-4, 13 JUL 2023 to 10 AUG 2023