
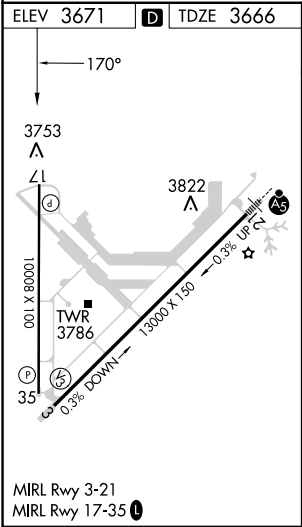


WAAS CH 65702 W17A	APP CRS 170°	Rwy Idg 10008 TDZE 3666 Apt Elev 3671
--	------------------------	--

RNAV (GPS) RWY 17

ROSWELL AIR CENTER (ROW)

RNP APCH - GPS.		MISSED APPROACH: Climb to 6000 direct KIGDE and hold.				
<div><div><div><div></div><div></div><div></div></div><div><div></div><div></div><div></div></div></div><div>ASR</div></div> <div>For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 41°C . When local altimeter setting not received, use Artesia altimeter setting: increase LPV DA to 3996 feet and all visibilities ¼ SM; increase LNAV/VNAV DA to 4083 feet; increase all MDAs 80 feet and visibility LNAV Cat C ¼ SM and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Artesia altimeter setting.</div>						
ATIS 128.45 306.2		ROSWELL APP CON* 119.6 239.0	ROSWELL TOWER* 118.5(CTAF) 0 233.7	GND CON 121.9 348.6	CLNC DEL 132.875 282.25	UNICOM 122.95

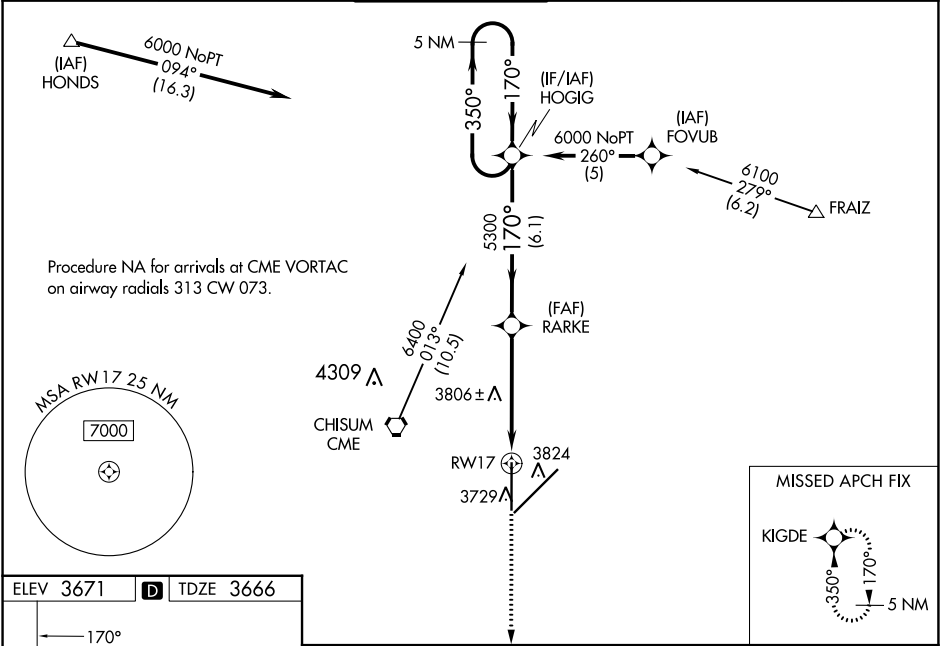

6000

↑

KIGDE

✦

HOGIG

5 NM Holding Pattern

350° →

← 170°

6000

RARKE

1.3 NM to RW17

1.3 NM

3.6 NM

6.1 NM

170°

5300

GP 3.00°

TCH 50

RW17

CATEGORY

A

B

C

D

LPV DA

3916-3¼ 250 (300-¾)

LNAV/VNAV DA

4003-1¼ 337 (400-1¼)

LNAV MDA

4120-1 454 (500-1)

4120-1¼ 454 (500-1¼)

4120-1½ 454 (500-1½)

CIRCLING

4140-1¼ 469 (500-1¼)

4140-1½ 469 (500-1½)

4300-2 629 (700-2)