


WAAS CH <b>50133</b> <b>W11A</b>	APP CRS <b>105°</b>	Rwy Idg TDZE <b>1183</b> Apt Elev <b>1183</b>
--	------------------------	---

RNAV (GPS) RWY 11  
PAYNESVILLE MUNI (PEX)

**⚠** Baro-VNAV and VDP NA when using Litchfield altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Litchfield altimeter setting and increase all DA 51 feet and all MDA 60 feet; increase LPV and LNAV/VNAV all Cats visibility 1/8 mile and LNAV Cat C and Circling Cat C visibility 1/4 mile.

MISSED APPROACH:  
Climb to 3000 direct  
UDALE and hold.

AWOS-3PT <b>120.35</b>	MINNEAPOLIS CENTER <b>125.5 323.1</b>	CTAF <b>122.9 0</b>
---------------------------	--	------------------------

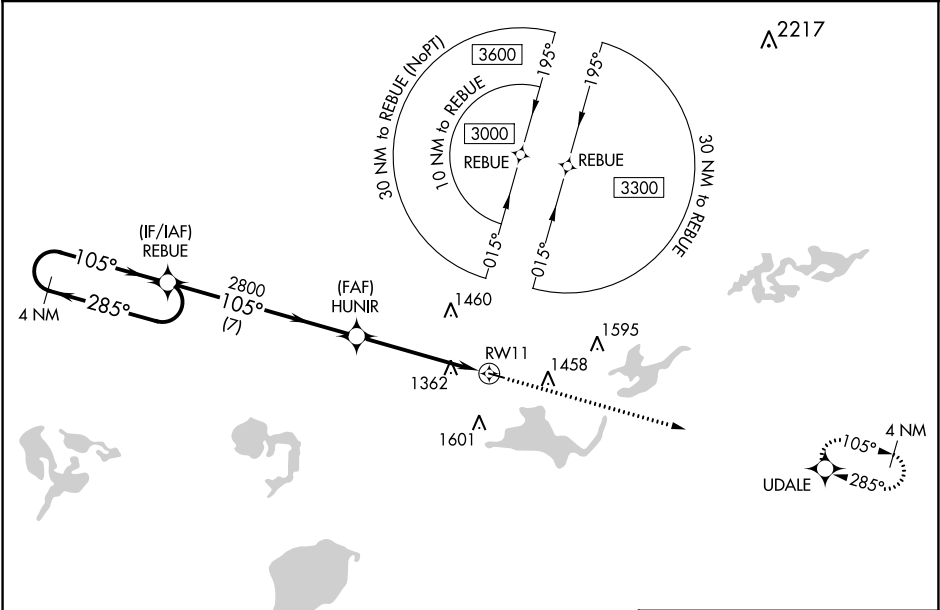

ELEV 1183		TDZE 1183	
-----------	--	-----------	--

4 NM Holding Pattern

REBUE

HUNIR

UDALE

3000

2800

2800

105°

285°

105°

285°

GP 3.00°

TCH 42

\*1.4 NM to RW11

\*LNAV only.

RW11

105° to RW11

3302 x 75

20

CATEGORY	A	B	C	D
LPV DA	1383-1 200 (200-1)			NA
LNAV/VNAV DA	1653-1½ 470 (500-1½)			NA
LNAV MDA	1680-1 497 (500-1)		1680-1¾ 497 (500-1¾)	NA
CIRCLING	1680-1 497 (500-1)	1760-1 577 (600-1)	1920-2 737 (800-2)	NA

MIRL Rwy 11-29 0

REIL Rws 11 and 29 0

NC-1, 13 JUL 2023 to 10 AUG 2023

NC-1, 13 JUL 2023 to 10 AUG 2023