


WAAS CH <b>58200</b> <b>W12A</b>	APP CRS <b>123°</b>	Rwy Idg <b>10201</b> TDZE <b>1359</b> Apt Elev <b>1384</b>
--	------------------------	--


RNAV (GPS) RWY 12C  
PHOENIX-MESA GATEWAY (IWA)

<p><b>⚠</b> DME/DME RNP-0.3 NA. For uncompensated Baro-VNAV systems LNAV/VNAV NA below -17°C (2°F) or above 46°C (115°F).</p>	<p>MISSED APPROACH: Climb to 5000 direct PADPE and on 213° track to RIYCO and hold.</p>
---	---

ATIS ★ <b>133.5 270.275</b>	PHOENIX APP CON <b>124.9 353.8</b>	GATEWAY TOWER ★ <b>120.6 (CTAF) 289.4</b>	GND CON <b>128.25 275.8</b>	CLNC DEL <b>135.05</b>
--------------------------------	---------------------------------------	--	--------------------------------	---------------------------

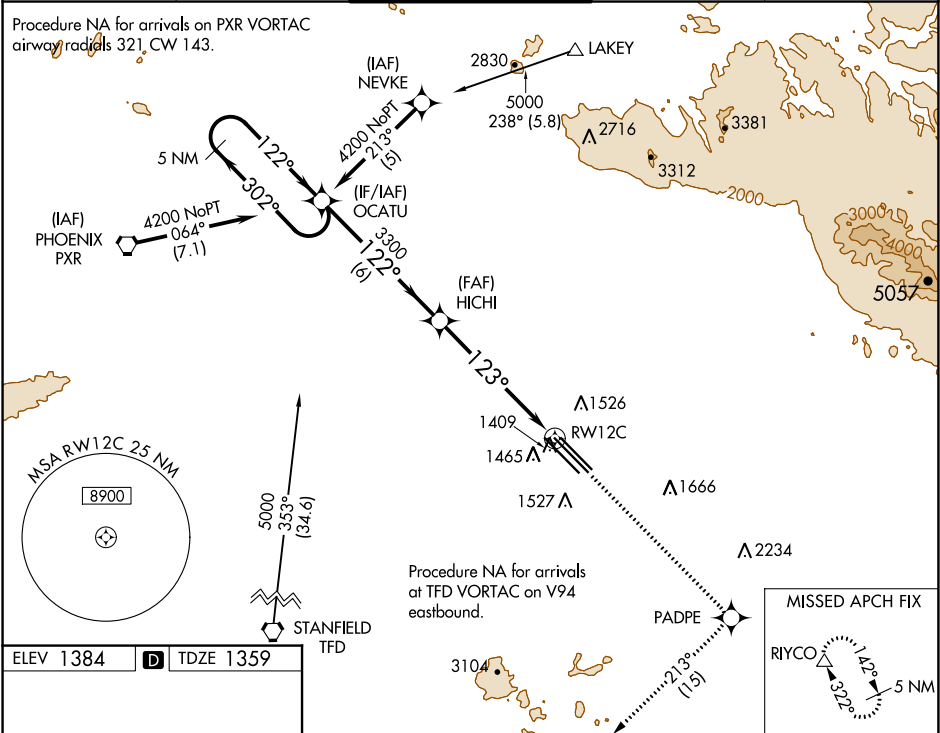

ELEV 1384	<b>D</b>	TDZE 1359
-----------	----------	-----------

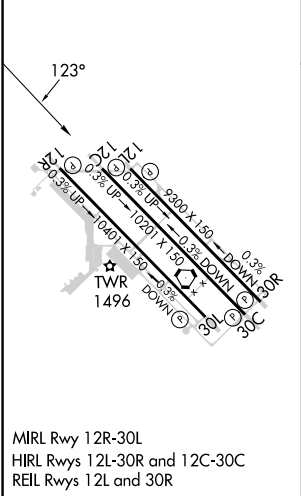

5 NM Holding Pattern		OCATU		5000 ↑		PADPE ✦		213° tr		RIYCO △	
4200 ← 302° 122° →		122°		HICHI 3300		*1.1 NM to RW12C		*LNAV only.			
GP 3.00° TCH 50				3300		123°		RW12C			
		6 NM		4.8 NM		1.1					
CATEGORY		A		B		C		D		E	
LPV DA				1609-1		250 (300-1)					
LNAV/ VNAV DA				1686-1¼		327 (400-1¼)					
LNAV MDA		1740-1		381 (400-1)				1740-1¼		381 (400-1¼)	
CIRCLING		1840-1¼		456 (500-1¼)		1880-1½ 496 (500-1½)		2000-2 616 (700-2)		2020-2¼ 636 (700-2¼)	