


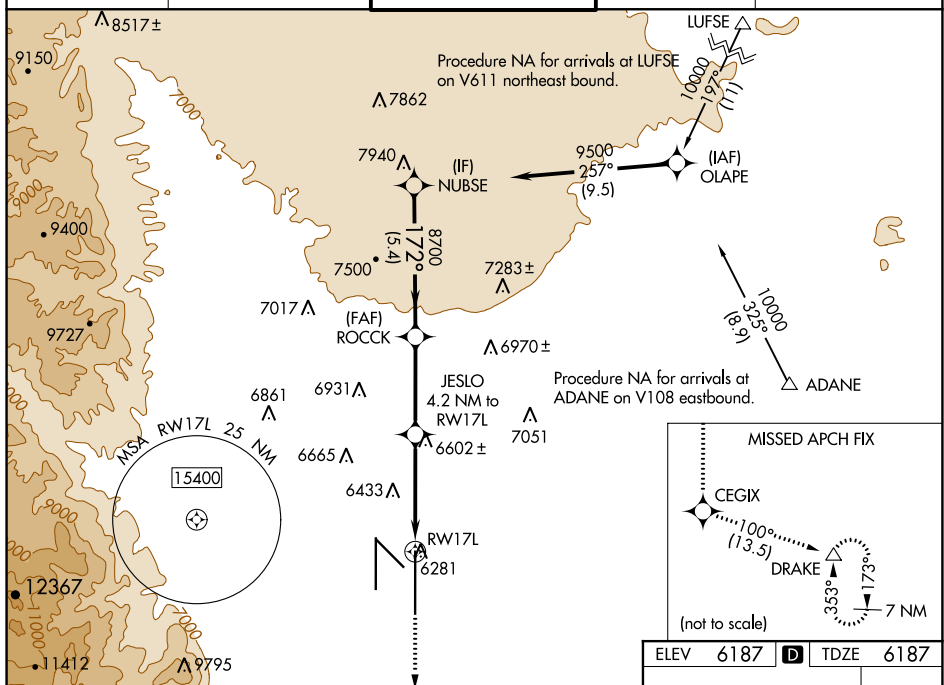


WAAS CH 69618 W17A	APP CRS 172°	Rwy Idg 13500 TDZE 6187 Apt Elev 6187
--	------------------------	--

RNAV (GPS) Y RWY 17L
CITY OF COLORADO SPRINGS MUNI (COS)

<p>RNP APCH - GPS.</p> <p> For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 44°C. For inop MALSR, increase LNAV Cat C/D visibility to 2½ SM.</p> <p></p>	<p>MALSR</p> 	<p>MISSED APPROACH: Climb to 9000 direct CEGIX and on track 100° to DRAKE and hold.</p>
--	--	---

ATIS 125.0 254.3	SPRINGS APP CON 124.0 257.875	SPRINGS TOWER 119.9 360.6	GND CON 121.7 348.6	CLNC DEL 134.45 363.125
---------------------	----------------------------------	------------------------------	------------------------	----------------------------



9000	CEGIG	DRAKE		
↑	✱	tr 100°	△	

RW17L → 2.4 NM → 1.8 NM → JESLO (4.2 NM to RW17L) → 3.5 NM → ROCCK (8700) → 5.4 NM → NUBSE (8900)

Bearing: 172°

GP 3.00° TCH 57

CATEGORY	A	B	C	D
LPV DA	6387/18		200 (200-½)	
LNAV/VNAV DA	6602/45		415 (500-¾)	
LNAV MDA	7000/24 813 (900-½)	7000/40 813 (900-¾)	7000-178	813 (900-1⅞)
C CIRCLING	7000-1¼	813 (900-1¼)	7040-2 ½ 853 (900-2 ½)	7260-3 1073 (1100-3)

