

APP CRS

286°

Rwy Idg

4001

TDZE

683

Apt Elev

683

RNAV (GPS) RWY 28

HENRY COUNTY (7W5)

RNP APCH.

▼

▲ NA

Rwy 28 helicopter visibility reduction below ¾ SM NA.
Circling Rwy 10 NA at night. Use Toledo Express altimeter setting. When not received, procedure NA.

MISSED APPROACH: Climbing left turn to 2300 direct IZUMY and hold.

TOL ASOS



118.75 290.225

TOLEDO APP CON

134.35 307.0

UNICOM

123.0 (CTAF) 0

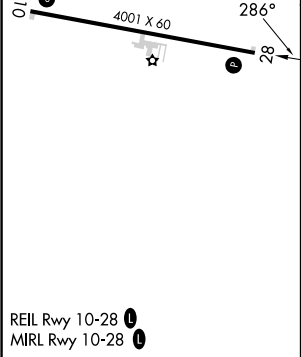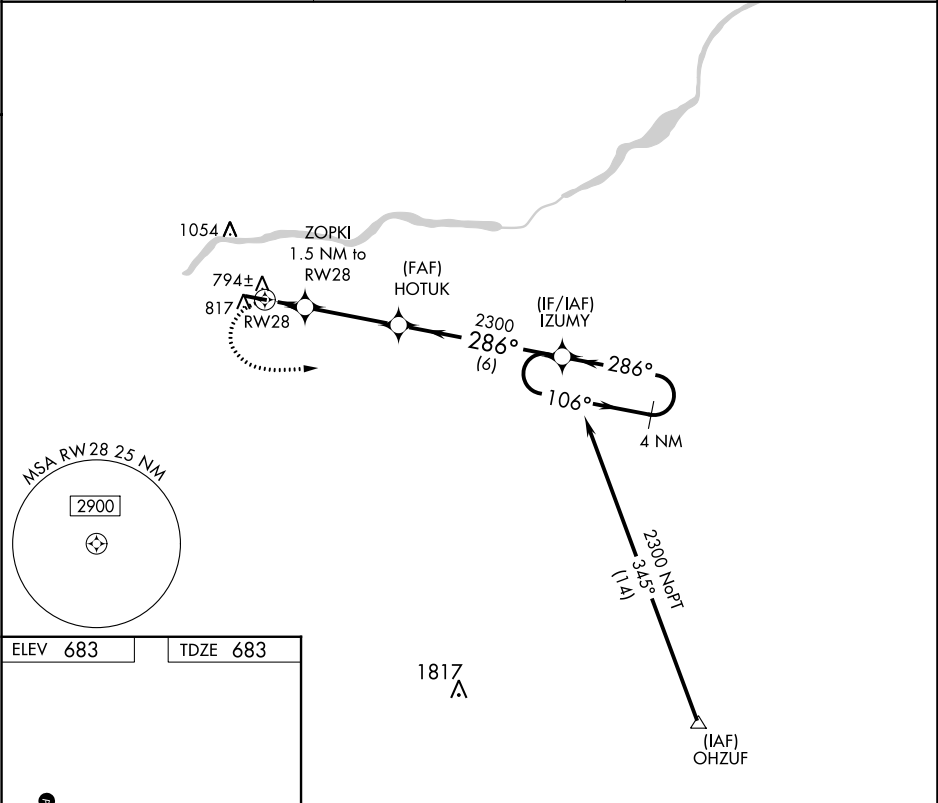

2300 IZUMY		VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 25).		4 NM Holding Pattern
RW28		ZOPKI 1.5 NM to RW28	HOTUK	IZUMY
1.5 NM		3.4 NM	6 NM	
CATEGORY	A	B	C	D
LNAV MDA	1100-1	417 (500-1)	1100-1½ 417 (500-1½)	NA
CIRCLING	1220-1	537 (600-1)	1400-2 717 (800-2)	NA