

WAAS CH 58204 W17A	APP CRS 168°	Rwy Idg 6501 TDZE 17 Apt Elev 17
--	------------------------	---

RNAV (GPS) RWY 17
TRENT LOTT INTL (PQL)


RNP APCH - GPS.

- ▼** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -5°C or above 54°C. When local altimeter setting not received, use Mobile Rgnl altimeter setting; increase LPV DA to 292 feet and LNAV/VNAV DA to 357 feet; increase LNAV/VNAV all visibilities 1/8 SM. Increase all MDA 80 feet and LNAV Cat C/D visibility 1/4 SM and Circling Cat C/D visibility 1/2 SM. Baro-VNAV and VDP NA with Mobile Rgnl altimeter setting. For Inop ALS when using Mobile Rgnl altimeter setting increase LPV all Cats visibility to 1/8 SM.



MISSED APPROACH:
Climb to 800 then
climbing left turn to
1800 direct BEZJU
and hold.

ATIS 135.175	MOBILE APP CON ★ 121.0 307.1	TRENT LOTT TOWER ★ 118.575 (CTAF) 0	GND CON 121.725	CLNC DEL 121.725	UNICOM 122.8
-----------------	---------------------------------	--	--------------------	---------------------	-----------------

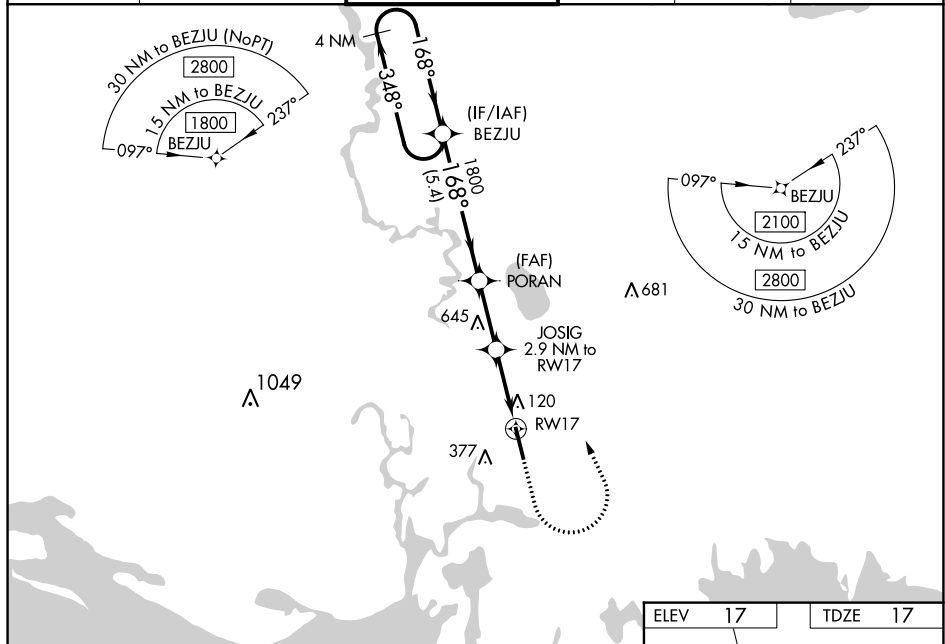

CATEGORY	A	B	C	D
LPV DA	217-½		200 (200-½)	
LNAV/VNAV DA	282-½		265 (300-½)	
LNAV MDA	380-½ 363 (400-½)		380-⅝ 363 (400-⅝)	
C CIRCLING	480-1 463 (500-1)	680-1 663 (700-1)	680-1¾ 663 (700-1¾)	680-2 663 (700-2)

MRL Rwy 17-35

