

WAAS CH <b>53530</b> <b>W32A</b>	APP CRS <b>317°</b>	Rwy Idg <b>3300</b> TDZE <b>1082</b> Apt Elev <b>1083</b>
--	------------------------	---


RNAV (GPS) RWY 32  
LAC QUI PARLE COUNTY (DXX)

RNP APCH.

**▼** Baro-VNAV NA when using Appleton Muni altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Appleton Muni altimeter setting: increase LPV DA to 1329 feet; increase LNAV/VNAV DA to 1409 feet and visibility ¼ SM; increase all MDAs 60 feet and Circling Cat C visibility ½ SM. Circling NA to Rwy 9 and 27.

**MISSED APPROACH:** Climb to 3000 direct WERUL and hold.

AWOS-3 <b>118.975</b>	MINNEAPOLIS CENTER <b>128.5 306.2</b>	UNICOM <b>122.8 (CTAF) 0</b>
--------------------------	--	---------------------------------

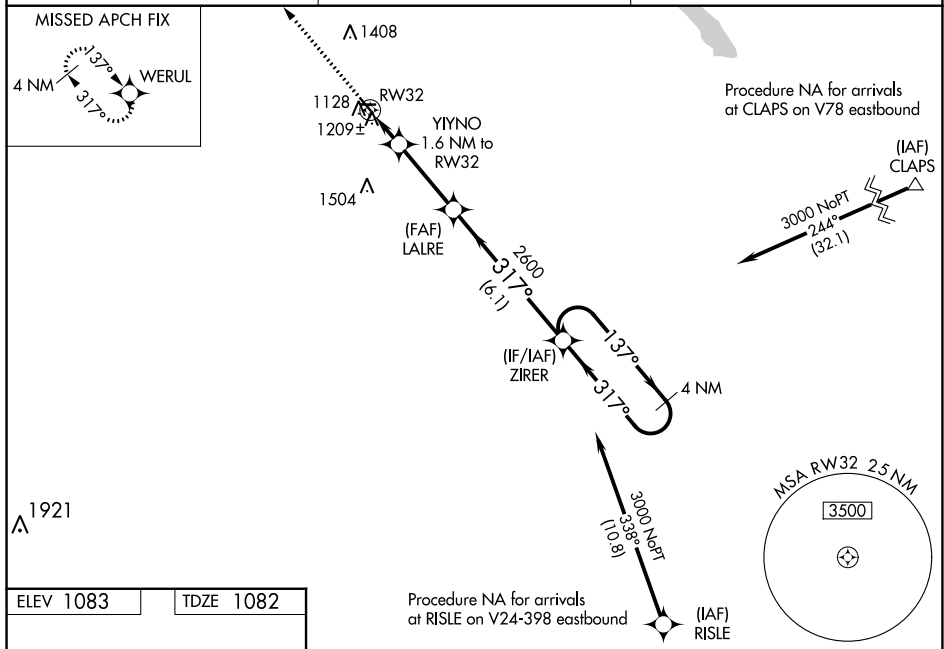

3003 X 135

3000 X 75

317°

137°

4 NM Holding Pattern

3000

GP 3.00° TCH 45

CATEGORY	A	B	C	D
LPV DA	1282-1	200 (200-1)		NA
LNNAV/VNAV DA	1363-1	281 (300-1)		NA
LNNAV MDA	1460-1	378 (400-1)	1460-1 $\frac{1}{8}$ 378 (400-1 $\frac{1}{8}$ )	NA
CIRCLING	1640-1	557 (600-1)	1820-2 737 (800-2)	NA