A

to 10 AUG 2023


13 JUL 2023

WAAS 6101 Rwy Idg TDZE APP CRS CH 81808 1414 181° 1421 Apt Elev W18A

RNAV (GPS) RWY 18 COLONEL JAMES JABARA (AAO)

For inoperative MALSR, increase LPV all Cats visibility to 1 mile and LNAV Cat D MALSR MISSED APPROACH: Climb visibility to 11/4. DME/DME RNP-0.3 NA. When local altimeter setting not received, to 3600 direct JUNLI and use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1720; hold. increase all MDAs 40 feet and Circling Cat D visibility 1/4 SM.

WICHITA APP CON **ASOS** CLNC DEL UNICOM 134,025 134.8 269.1 125.0 122.7 (CTAF) (

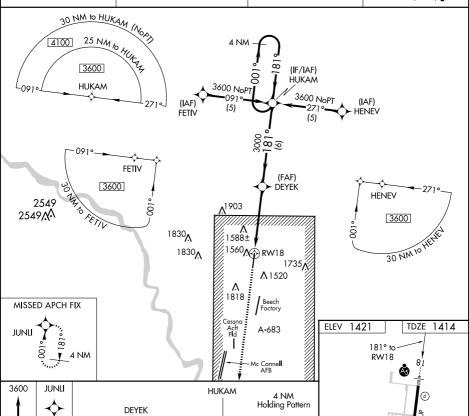

5.,,	, no				, <u> </u>	Ac Conne ll AFB
3600 JL		DE	EYEK	HUK	AM	4 NM Holding Pattern
	1.2 NM to RW18	3	000	\°		<u>01°→</u> <u>3600</u>
RW1	8		* <u>300</u>	<u>0</u>		GP 3.00° TCH 45
-	1.2 - 3	.6 NM —				
CATEGORY	A		В	c		D
LPV DA	1680-½ 266 (300-½)					
LNAV MDA	182	20-1/2 40	06 (400-½)	1820-¾ 406 (400-¾)		1820-1 406 (400-1)
CIRCLING	1880	-1	1940-1	2120	-2	2220-21/2

519 (600-1)

1486☆ 101 x 1º REIL Rwy 36 MIRL Rwy 18-36

WICHITA, KANSAS Orig-D 30DEC21

459 (500-1)

CIRCLING

COLONEL JAMES JABARA (AAO) RNAV (GPS) RWY 18

799 (800-21/2)

699 (700-2)