

| | | | |
|--|------------------------|-----------------------------|---------------------------------------|
| WAAS CH 56331 W04A | APP CRS 043° | Rwy Idg TDZE Apt Elev | 8748 37 40 |
|--|------------------------|-----------------------------|---------------------------------------|


RNAV (GPS) RWY 4

Wallops Flight Facility (WAL)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Salisbury altimeter setting: increase LPV DA to 342 and all Cats visibility ¼ mile; increase LNAV/VNAV DA to 510 and all Cats visibility ¼ mile; increase all MDA 60 feet and LNAV Cats C/D and Circling Cat C visibility ¼ mile. Baro-VNAV and VDP NA when using Salisbury altimeter setting.

MISSED APPROACH: Climb to 600 then climbing left turn to 2000 direct MAGGO and hold.

| | | | | |
|------------------------|---|---|-----------------------------------|--------------------------|
| ASOS 119.175 | PATUXENT APP CON ★ 127.95 314.0 | Wallops Tower ★ 126.5 (CTAF) 0 306.975 (CTAF) 0 | GND CON 127.875 269.325 | CLNC DEL 121.7 |
|------------------------|---|---|-----------------------------------|--------------------------|

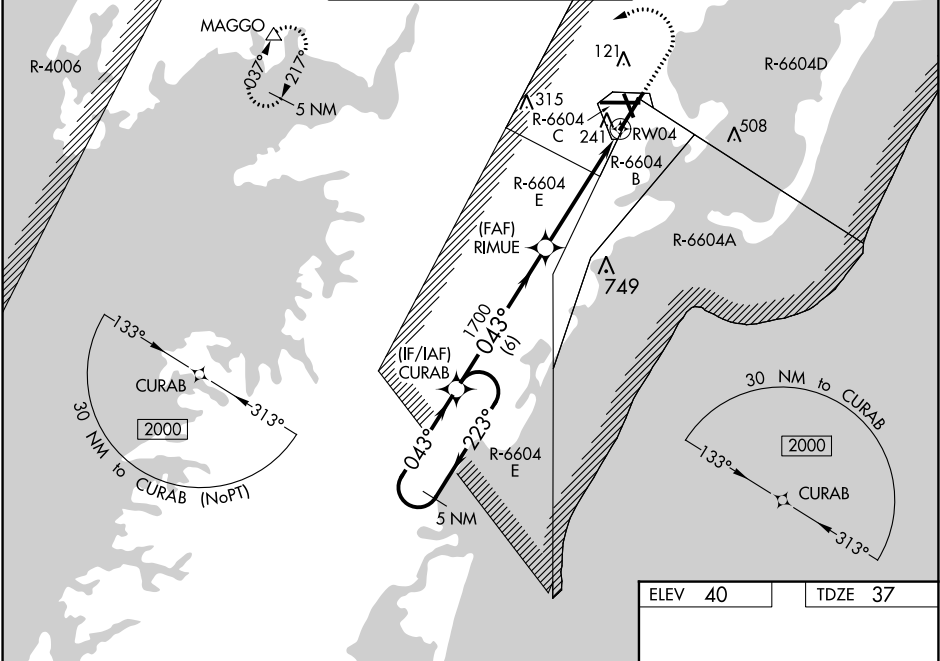

5 NM Holding Pattern CURAB

2000 ← 223° 043° → 1700

GP 3.00° TCH 57

RIMUE 1700

RW04

6 NM 3.6 NM 1.5

* 1.5 NM to RW04

* LNAV only.

MAGGO

| CATEGORY | A | B | C | D |
|--------------|-------|-------------|------------------------|------------------------|
| LPV DA | | 287-¾ | 250 (300-¾) | |
| LNAV/VNAV DA | | 455-1⅜ | 418 (500-1⅜) | |
| LNAV MDA | 560-1 | 523 (600-1) | 560-1½ | 523 (600-1½) |
| CIRCLING | 600-1 | 560 (600-1) | 620-1½ 580 (600-1½) | 860-2¾ 820 (900-2¾) |

