V


EC-1, 13 JUL 2023 to 10 AUG 2023

WAAS 6579 Rwy Idg APP CRS 1328 CH 56327 TDŻE 276° Apt Elev 1328 **W27A**

RNAV (GPS) RWY 27 GAYLORD RGNL (GLR)

Circling to Rwy 18 and Rwy 36 NA at night. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Grayling altimeter setting and increase all DA 71 feet and all MDA 80 feet. Increase LNAV and Circling Cats C and D visibility ¼ mile. MISSED APPROACH: Climb to

Δ 3000 direct WODIV and hold. Rwy 27 Helicopter visibility reduction below 3/4 SM NA. UNICOM MINNEAPOLIS CENTER **ASOS** 122.8 (CTAF) (118,375 134.6 354.05 NSA RW 27 25 Ny RONDO Z 3500 Λ 2167 (4) 2409 (IAF) Procedure NA for arrival ZINBU at GLR VOR/DME on V233 southbound. **GAYLORD** ALPENA 1860∧ GLR 4 NM APN **∧** 1721 3100 NoPT & 1442±∧ م¹⁶³⁰ -270° (38.2) 2700 276° (6.1)MISSED APCH FIX (FAF) (IF/IAF) ^{1492±}∧ WODIV HŮVÓK COBIB Procedure NA for arrival 3100 to COBIB on APN VORTAC **■** 276% 096° (10.8) airway radials 201 CW 346. **1**914 R-4201A **ELEV** 1328 **TDZE 1328** (IAF) ZABLE 3000 WODI\ 4 NM

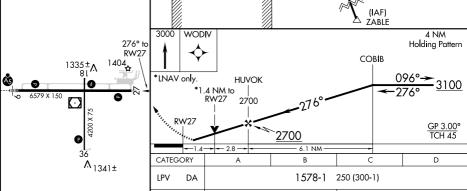

HIRL Rwy 9-27 🕕 GAYLORD, MICHIGAN Orig-C 20MAY21

REIL Rwy 18, 27 and 36 🕕 MIRL Rwy 18-36 🛭

> GAYLORD RGNL (GLR) RNAV (GPS) RWY 27

492 (500-1%)

2080-21/2

752 (800-21/2)

1820-1%

2040-2

712 (800-2)

1840-1

512 (600-1)

1820-1 492 (500-1)

1940-1

612 (700-1)

LNAV MDA

CIRCLING