

WAAS  
CH **61338**  
**W12A**

APP CRS  
**125°**

Rwy Idg  
TDZE  
Apt Elev  
**4200**  
**2756**  
**2756**

RNAV (GPS) RWY 12

BEACH (20U)


RNP APCH.  
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C.

MISSED APPROACH: Climb to 5000 direct EKOYU and hold.

AWOS-3  
**118.175**

SALT LAKE CENTER  
**126.85 305.2**

UNICOM  
**122.8** (CTAF) **0**

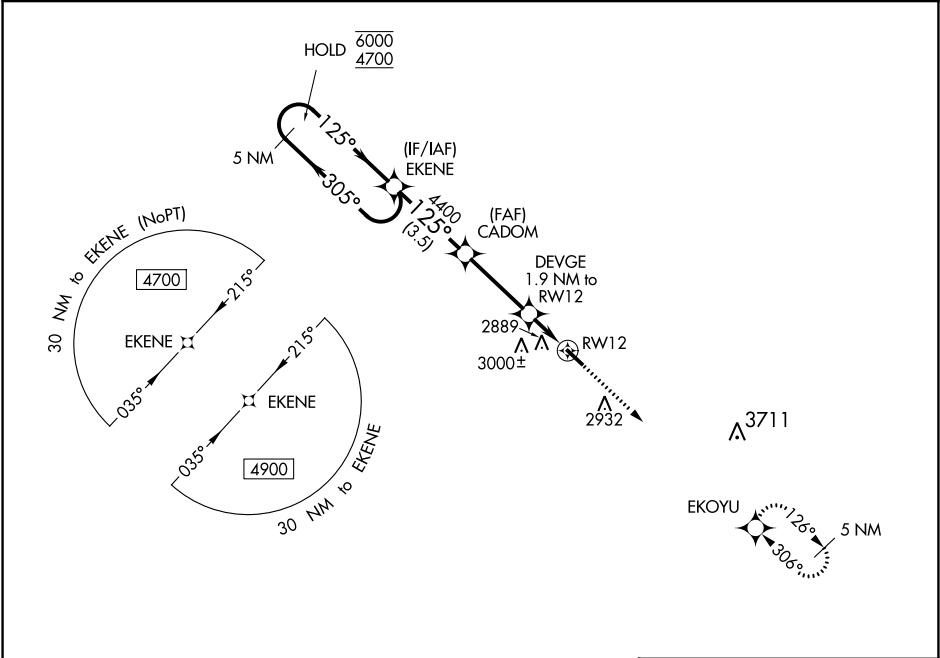

5 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).

5000

EKOYU

GP 3.00° TCH 40

\*3400

\*1.1 NM to RW12

\*LNAV only

ELEV 2756

TDZE 2756

CATEGORY	A	B	C	D
LPV DA	3006-1	250 (300-1)		NA
LNAV/VNAV DA	3051-1	295 (300-1)		NA
LNAV MDA	3140-1	384 (400-1)		NA
CIRCLING	3280-1 524 (600-1)	3360-1 604 (700-1)		NA

MIRL Rwy 12-30 **0**