




WAAS CH 72809 W18A	APP CRS 180°	Rwy Idg 8536 TDZE 653 Apt Elev 656
--	------------------------	---

RNAV (GPS) RWY 18

LA CROSSE RGNL (LSE)

RNP APCH.

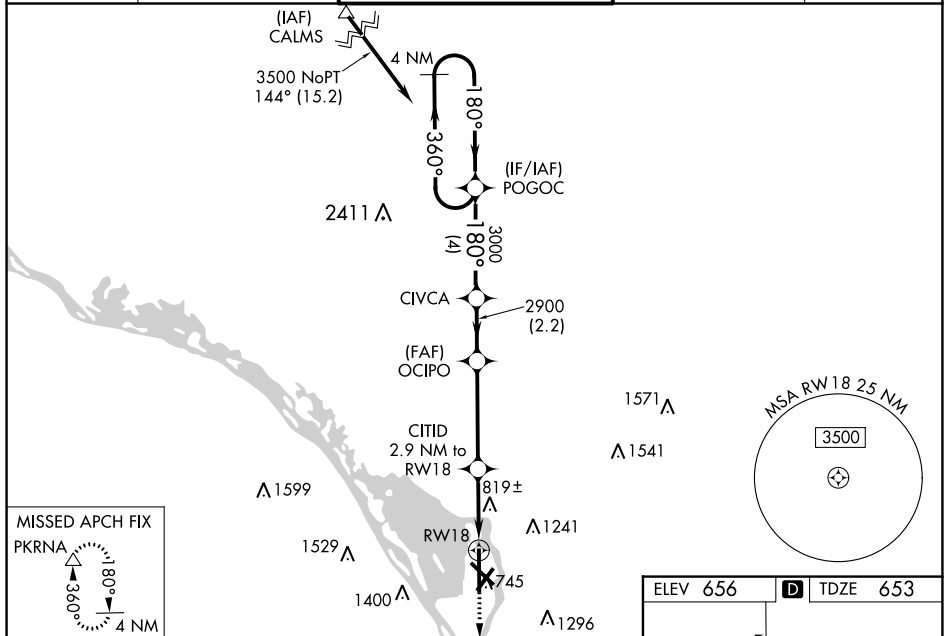
	For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -27° C or above 54° C. When local altimeter setting not received, use Winona altimeter setting:
	increase LPV DA to 987 feet, LNAV/VNAV DA to 1257 feet and all MDA 60 feet.
	-22°C Increase LNAV/VNAV all Cats visibility 1/4 SM and Circling Cat C visibility 1/4 SM.
	For inoperative MALSR, increase LPV all Cts visibility 1/2 SM. LNAV minimums NA with Winona altimeter setting. Baro-VNAV and VDP NA when using Winona altimeter setting. Circling to Rwy 22 NA at night.

MALSR

A5

MISSED APPROACH:
Climb to 3000 direct
PKRNA and hold.

ATIS 124.95	MINNEAPOLIS CENTER 128.6 363.0	LA CROSSE TOWER ★ 118.45 (CTAF) 0 251.075	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

[illegible]

ELEV 656

180°

81

87.42 X 150

6050 X 150

6050 X 150

6050 X 150

712

TWR 724

MIRL Rwy 13-31

HIRL Rwy 4-22 and 18-36

REIL Rwy 13, 31 and 36