

WAAS
CH **45905**
W22A

APP CRS
215°

Rwy Idg
TDZE **26**
Apt Elev **26**

7193

26

26

RNAV (GPS) RWY 22



PUNTA GORDA (PGD)

RNP APCH.

Baro-VNAV NA when using Page Fld altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 1°C or above 54°C. When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 276, LNAV/VNAV DA to 360, and all MDAs 60 feet; increase LNAV Cats C and D visibility ¼ SM, and Circling Cats C and D visibility ¼ SM.

MISSED APPROACH: Climb to 2000 direct BULOW and hold.

ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
--------------------------	---	--	--------------------------	---------------------------	--	--------------------------

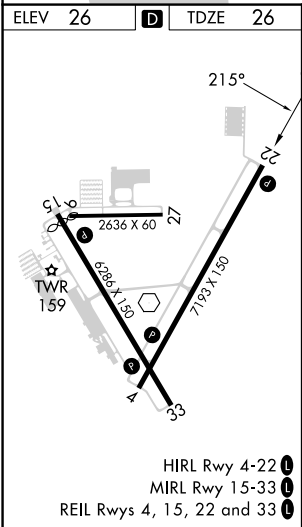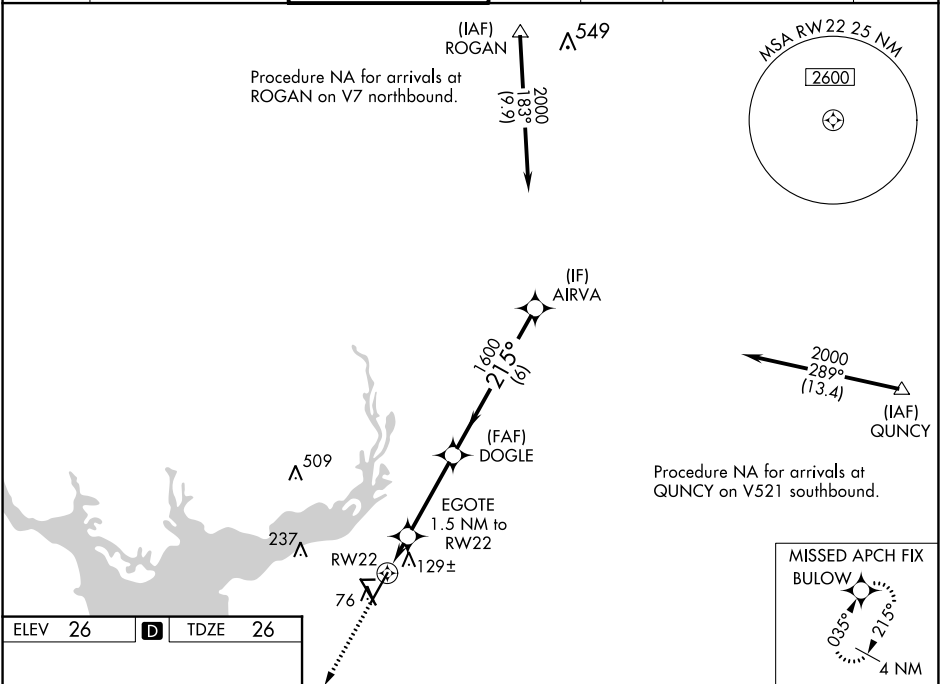

2000 BULOW				VGSI and descent angles not coincident (VGSI Angle 3.00/TCH 31).			
*LNAV only.				AIRVA			
RW22				DOGLE			
EGOTE 1.5 NM to RW22				2000			
1.5 NM				3.3 NM			
6 NM				GP 3.00° TCH 40			
CATEGORY	A		B		C		D
LPV DA	226-3/4		200 (200-3/4)				
LNAV/VNAV DA	310-1		284 (300-1)				
LNAV MDA	420-1		394 (400-1)		420-1 1/8		394 (400-1 1/8)
CIRCLING	460-1		580-1		600-1 1/2		740-2 1/4
	434 (500-1)		554 (600-1)		574 (600-1 1/2)		714 (800-2 1/4)