

RNAV (GPS) Y RWY 31  
GRANT COUNTY (W99)

**T**  
**A**  
**☃**-8°C

Rwy 31 helicopter visibility reduction below  $\frac{3}{4}$  SM NA.  
When local altimeter setting not received, procedure NA.

**MISSED APPROACH:** Climbing right turn to 5000 direct ESL VOR/DME and hold.





UNICOM  
122.8 (CTAF) **L**

Diagram illustrating the beam configuration and camber. The beam is labeled 5000 X 75. The camber is indicated as 0.3% Up. A gap of 1/2 inch is shown at the support.

5000	ESL	VGSI and descent angles not coincident (VGSI Angle 6.50/TCH 46).	WOLUB	5 NM Holding Pattern
		FEKUP      PADOH		

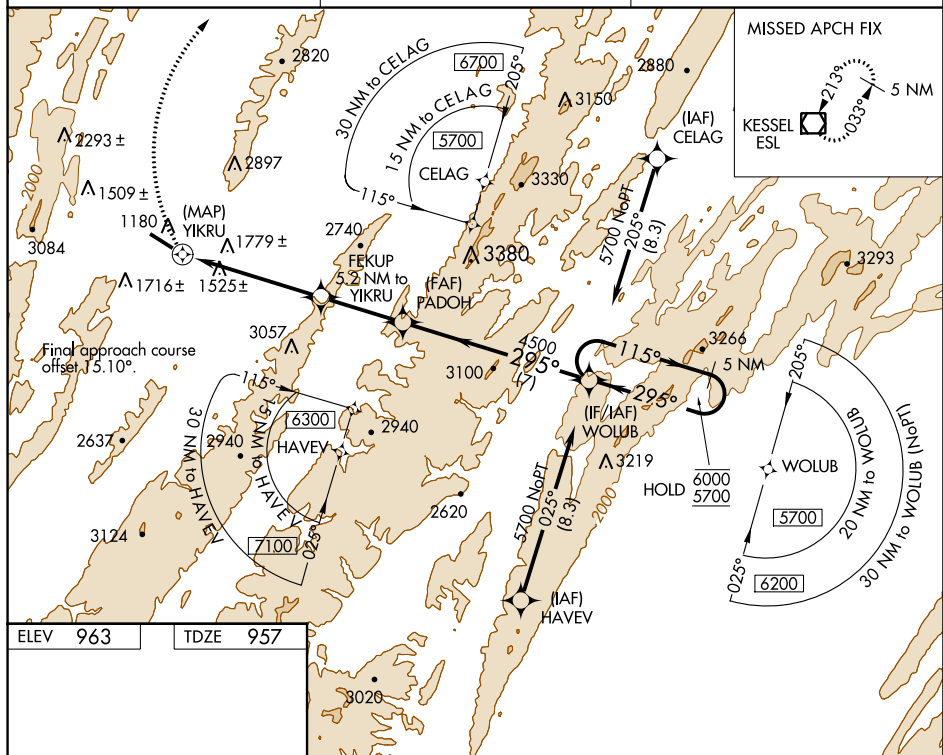

CATEGORY	A	B	C	D
LP MDA	2620-1¼ 1663 (1700-1¼)	2620-1½ 1663 (1700-1½)		NA
LNAV MDA	2740-1¼ 1783 (1800-1¼)	2740-1½ 1783 (1800-1½)		NA
<b>C</b> CIRCLING	2740-1¼ 1777 (1800-1¼)	2740-1½ 1777 (1800-1½)		NA

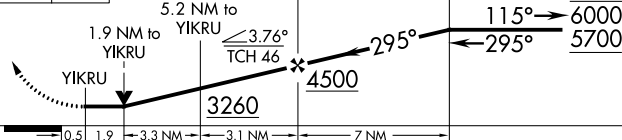PETERSBURG, WEST VIRGINIA  
Orig-C 15JUN23

GRANT COUNTY (W99)

RNAV (GPS) Y RWY 31