





APP CRS	Rwy Idg	8950
042°	TDZE	9
	Apt Elev	13

RNAV (RNP) Z RWY 4R
DANIEL K INOUE INTL (HNL) (PHNL)

RNP AR APCH.  For uncompensated Baro-VNAV systems, procedure NA below 17°C or above 54°C. For inop ALS, increase RNP 0.30 Cat A visibility to 3/4 SM and Cat B to 1/2 SM.		MALSR 	MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct ALANA and hold.	
D-ATIS 127.9 251.15	HCF APPROACH 118.3 269.0	HONOLULU TOWER 118.1 257.8 123.9 273.575 (Rwy 8R/26L)		GND CON 121.9 348.6
				CLNC DEL 121.4 281.4

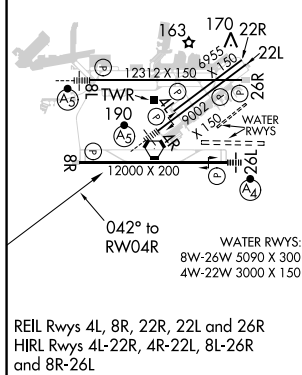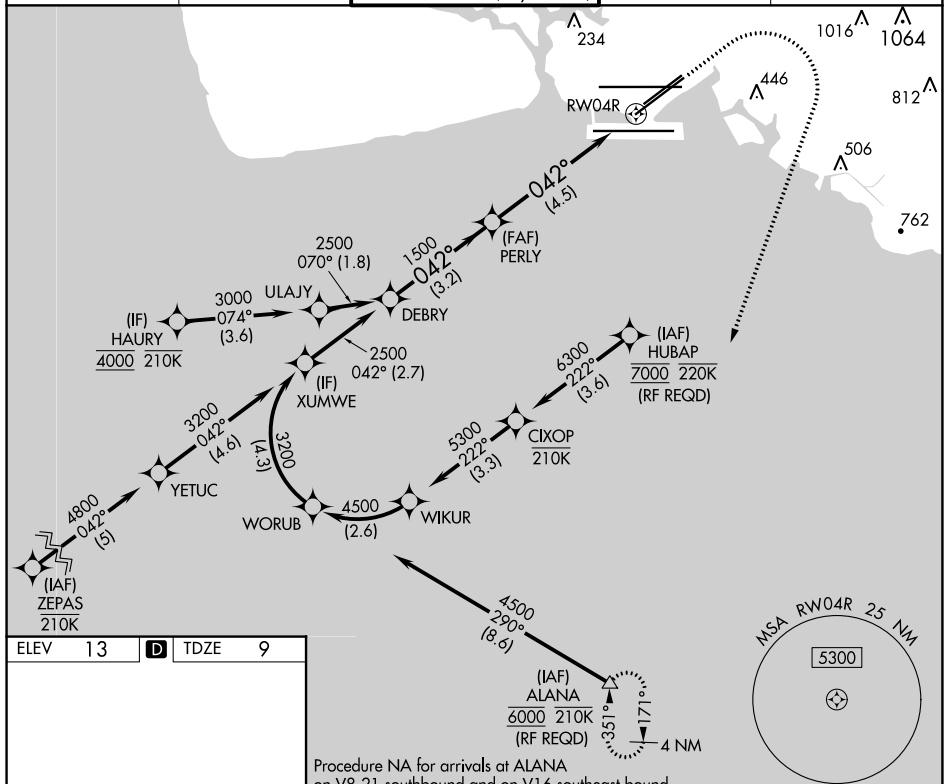

DEBRY

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00/TCH 71).

ALANA

580

3000

\triangle

GP 3.00°
TCH 55°

042°

PERLY

1500

1.500

See planview for multiple IF locations.

RWY04R

CATEGORY	A	B	C	D
RNP 0.30 DA	259- $\frac{1}{2}$ 250 (300- $\frac{1}{2}$)	277- $\frac{1}{2}$ 268 (300- $\frac{1}{2}$)	432- $\frac{3}{4}$	423 (500- $\frac{3}{4}$)

AUTHORIZATION REQUIRED