

WAAS CH 97340 W13A	APP CRS 126°	Rwy Idg TDZE Apt Elev	5624 2630 2634
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 13


FRANK WILEY FLD (MLS)

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -24°C or above 54°C.

MISSED APPROACH: Climb to 6000 direct BOKDE and hold, continue climb-in-hold to 6000.

ASOS 135.575	SALT LAKE CENTER 126.85 305.2	UNICOM 123.0 (CTAF)
------------------------	---	-------------------------------

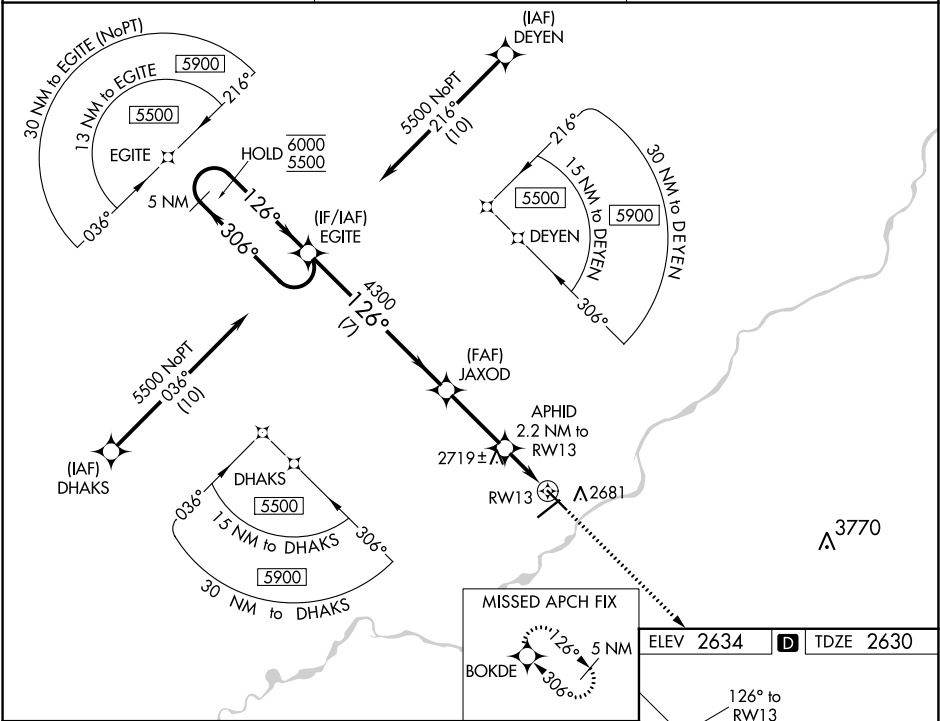

<div>5 NM Holding Pattern</div> <div>EGITE</div> <div>6000 ← 306°</div> <div>5500 → 126°</div> <div>GP 3.00°</div> <div>TCH 43</div>					<div>JAXOD</div> <div>4300</div> <div>APHID 2.2 NM to RW13</div> <div>1 NM to RW13</div> <div>RW13</div> <div>3360</div> <div>7 NM</div> <div>3 NM</div> <div>1.2 NM</div> <div>1 NM</div>					<div>6000 BOKDE</div> <div>126° to RW13</div> <div>5764 X 75</div> <div>22.00 X 100</div> <div>2684</div>				
CATEGORY	A	B	C	D										
LPV DA	2880-1		250 (300-1)											
LNNAV/VNAV DA	2880-1		250 (300-1)											
LNNAV MDA	2980-1		350 (400-1)											
CIRCLING	3060-1 426 (500-1)	3100-1 466 (500-1)	3160-1½ 526 (600-1½)	3320-2¼ 686 (700-2¼)										
					MIRL Rwy 4-22 and 13-31					REIL Rwy 4, 13, 22 and 31				