

WAAS CH <b>50109</b> <b>W17A</b>	APP CRS <b>174°</b>	Rwy Idg <b>6705</b> TDZE <b>1530</b> Apt Elev <b>1533</b>
----------------------------------------	------------------------	-----------------------------------------------------------------

RNAV (GPS) RWY 17  
NEWTON-CITY-COUNTY (EWK)

RNP APCH.



**▼** When local altimeter setting not received, use Wichita Dwight D Eisenhower Ntl altimeter setting: increase LPV DA to 1891 feet and visibility  $\frac{1}{2}$  SM; increase all MDAs 100 feet and visibility Cat C and LNAV Cat D  $\frac{1}{2}$  SM. VDP NA when using Wichita Dwight D Eisenhower Ntl altimeter setting. For inop ALS, increase LPV visibility to  $\frac{3}{4}$  SM and LNAV Cat C/D to 1 $\frac{1}{2}$  SM. For inop ALS when using Wichita Dwight D Eisenhower Ntl altimeter setting, increase LPV visibility to 1 SM. Circling Rwy 8, 26 NA at night.

MALSR



**MISSED APPROACH:**  
Climb to 3600 direct  
SPINA and hold.

AWOS-3PT <b>123.875</b>	WICHITA APP CON <b>125.5 306.2</b>	CLNC DEL <b>126.55</b>	UNICOM <b>123.0 (CTAF) ①</b>
----------------------------	---------------------------------------	---------------------------	---------------------------------

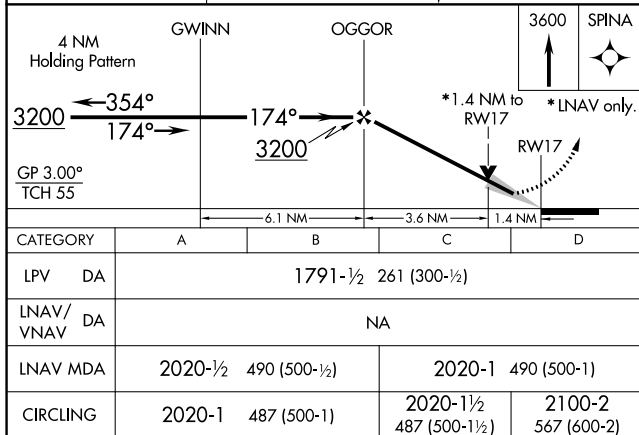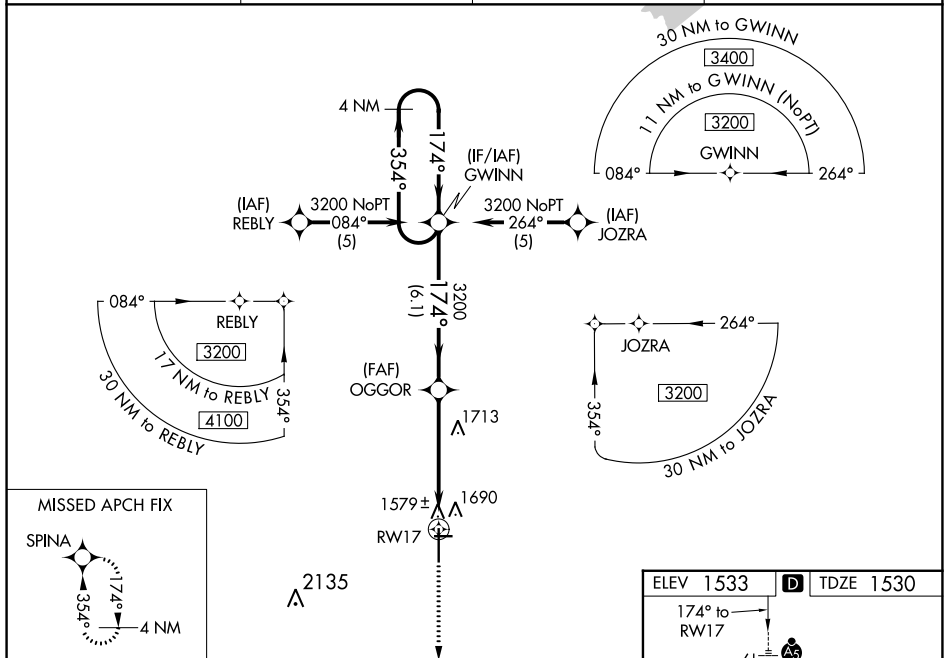

CATEGORY	A	B	C	D
LPV DA	1791-½ 261 (300-½)			
LNAV/ VNAV DA	NA			
LNAV MDA	2020-½ 490 (500-½)		2020-1 490 (500-1)	
CIRCLING	2020-1 487 (500-1)		2020-1½ 487 (500-1½)	2100-2 567 (600-2)

