

WAAS CH 93831 W13A	APP CRS 132°	Rwy Idg TDZE Apt Elev	5003 2822 2822
--	------------------------	-----------------------------	---


RNAV (GPS) RWY 13
WINKLER COUNTY (INK)

RNP APCH.

Baro-VNAV NA when using Pecos altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. VDP NA with Pecos altimeter setting. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Pecos altimeter setting: Increase DA to 3167 feet and LPV and LNAV/VNAV all Cats visibility ¾ SM; increase all MDAs 100 feet and LNAV and Circling Cat C visibility ¼ SM.

MISSED APPROACH:
Climb to 5000 direct BORTY and hold.

ASOS 118.325	FORT WORTH CENTER 133.1 298.95	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

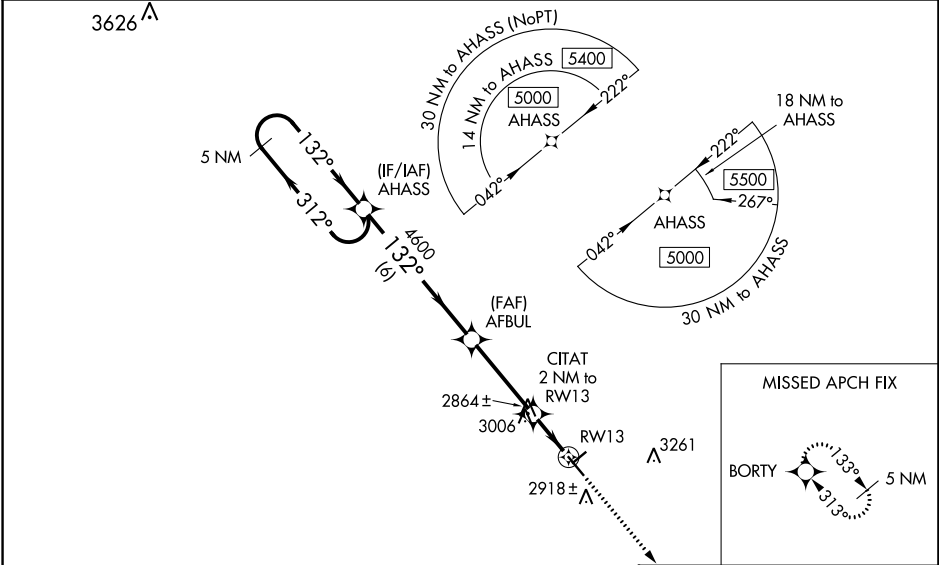

5 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 22).

5000 BORTY

GP 3.00° TCH 45

5000 ← 312° 132° → 4600

AFBUL 4600

CITAT 2 NM to RW13

*LNAV only

*0.8 NM to RW13

6 NM 3.4 NM 1.2 NM 0.8

CATEGORY	A	B	C	D
LPV DA	3072-¾ 250 (300-¾)			NA
LNAV/VNAV DA	3072-¾ 250 (300-¾)			NA
LNAV MDA	3320-1 498 (500-1)		3320-1⅜ 498 (500-1⅜)	NA
CIRCLING	3320-1 498 (500-1)		3580-2¼ 758 (800-2¼)	NA

MIRL Rwy 4-22 and 13-31 0

SC-3, 13 JUL 2023 to 10 AUG 2023

SC-3, 13 JUL 2023 to 10 AUG 2023