

APP CRS  
**191°**

Rwy Idg  
TDZE  
**280**

Apt Elev  
**285**

**RNAV (RNP) Z RWY 19**


ALBANY INTL (ALB)

RNP AR APCH.  
▼ For uncompensated Baro-VNAV systems, procedure NA below -15°C or above 47°C. For inop ALS increase RNP 0.30 visibility to 1 1/2.

MALSR

MISSED APPROACH: Climb to 3000 on track 191° to CUVLU and on track 195° to GROUP and hold.

D-ATIS <b>120.45</b>	ALBANY APP CON <b>132.825 307.2</b>	ALBANY TOWER <b>119.5 257.8</b>	GND CON <b>121.7 348.6</b>	CLNC DEL <b>127.50</b>
-------------------------	--	------------------------------------	-------------------------------	---------------------------

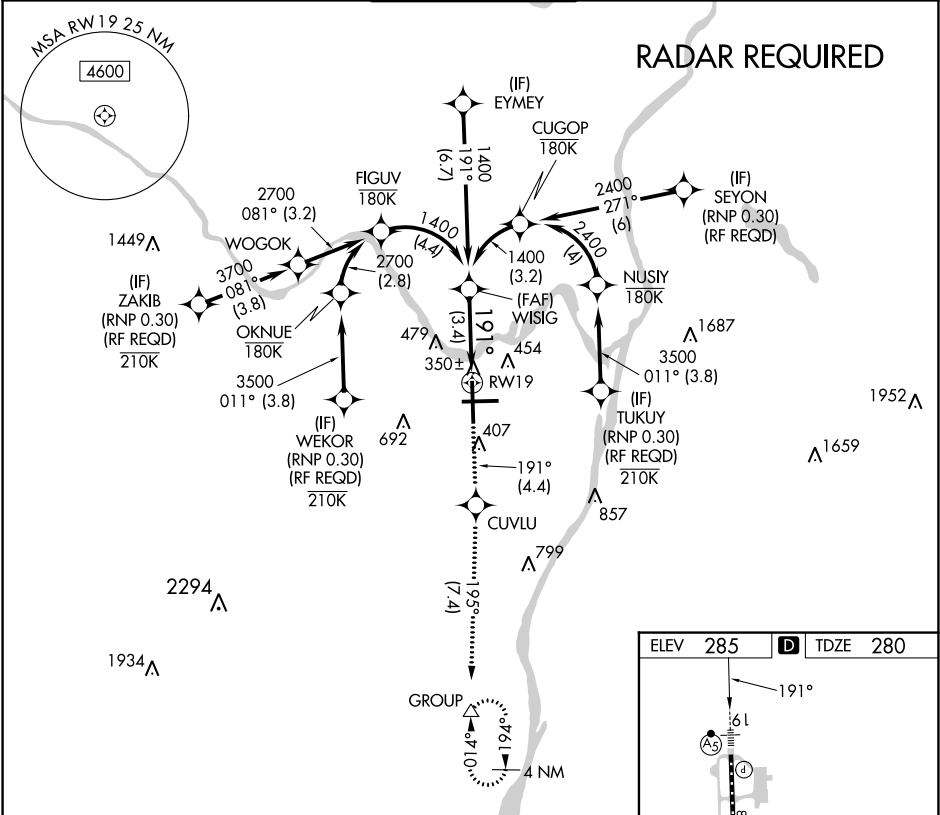

3000

↑

tr 191°

CUVLU

tr 195°

GROUP

1400

GP 3.00°

TCH 54

191°

RW19

See planview for multiple IF locations.

3.4 NM

CATEGORY	A	B	C	D
RNP 0.30 DA	763/50 483 (500-1)			

**AUTHORIZATION REQUIRED**

ELEV 285

D

TDZE 280

191°

AS

TWR 399

7200 X 150

AS

1

TDZ/CL Rwy 1

HIRL Rwy 1-19

MIRL Rwy 10-28

REIL Rwy 10 and 28