


WAAS CH 63013 W15A	APP CRS 147°	Rwy Idg 4001 TDZE 21 Apt Elev 24
----------------------------------------	------------------------	-------------------------------------------------------------

RNAV (GPS) RWY 15

SHAKTOOLIK (2C7) (PFSH)

RNP APCH.	Baro-VNAV and VDP NA when using Unalakleet altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. When local altimeter setting not received use Unalakleet altimeter setting and increase all DA 72 feet and all MDA 80 feet; increase LNAV Cats C and D visibility 1/8 SM, and Circling Cat D visibility 1/4 SM.	MISSED APPROACH: Climb to 3500 direct FANUB and hold, continue climb-in-hold to 3500.
-----------	------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------------------------------------------------------------------------------

AWOS-3P 124.175	ANCHORAGE CENTER 135.7 335.5	NOME RADIO 122.3	UNICOM 122.8 (CTAF)
---------------------------	----------------------------------------	----------------------------	-------------------------------

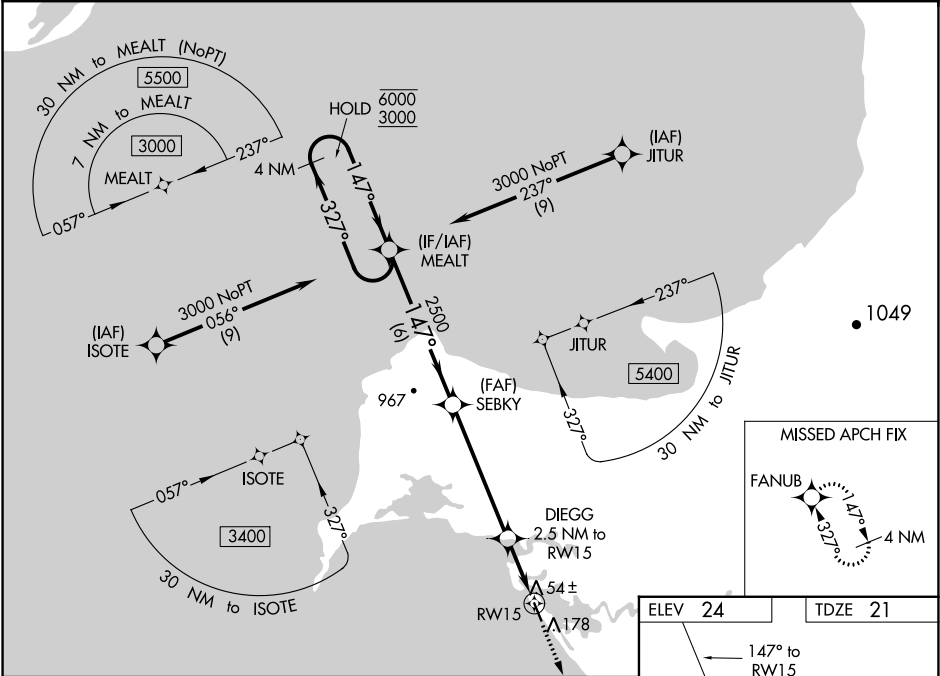

4 NM Holding Pattern		MEALT	SEBKY	DIEGG 2.5 NM to RW15	3500 FANUB
6000 ← 327°		3000 → 147°	2500	*0.9 NM to RW15	*LNAV only.
GP 3.00°		TCH 40	*840	RW15	
6 NM		5.2 NM	1.6	0.9	
CATEGORY	A	B	C	D	
LPV DA	271-1	250 (300-1)			
LNAV/VNAV DA	271-1	250 (300-1)			
LNAV MDA	360-1	339 (400-1)			
CIRCLING	480-1	456 (500-1)	480-1½ 456 (500-1½)	740-2¼ 716 (800-2¼)	

