

APP CRS  
218°

Rwy Idg  
TDZE  
Apt Elev

13502  
3606  
3607

RNAV (RNP) Z RWY 22

RICK HUSBAND AMARILLO INTL (AMA)


▼ For uncompensated Baro-VNAV systems, procedure NA below -14°C (7°F) or above 52°C (125°F). RF required. For inop ALS, increase RNP 0.14 all Cats visibility to ¾ SM and increase RNP 0.30 all Cats visibility to 1½ SM.

ASR

MALSR  
A5

MISSED APPROACH: (Do not exceed 185 K until FIMVI) Climb to 5400 on track 218° to WEBVI, left turn to FIMVI, then track 070° to CAUDE and hold.

ATIS 118.85 350.3	AMARILLO APP CON★ 119.5 307.0	AMARILLO TOWER★ 118.3(CTAF) 257.9	GND CON 121.9 348.6	CLNC DEL 121.65 239.275	UNICOM 122.95
----------------------	----------------------------------	--------------------------------------	------------------------	----------------------------	------------------

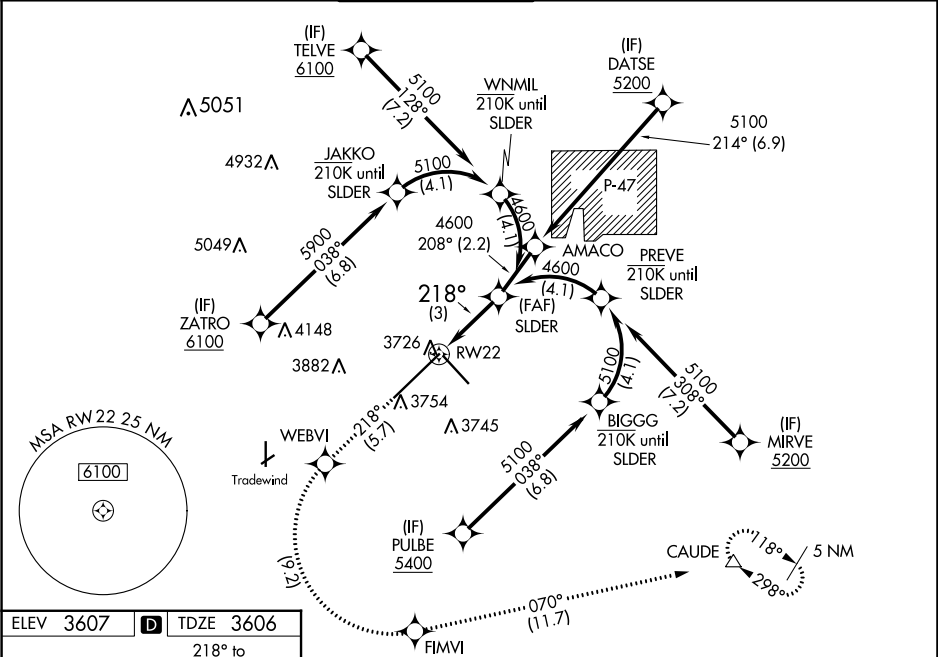

ELEV 3607 D TDZE 3606

218° to RW22

TWR 3724  
13502 X 200  
7901 X 190

RNAV 1 - GPS or RADAR REQUIRED

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 77).

5400 WEBVI FIMVI CAUDE  
tr 218° tr 070°

See planview for multiple IF locations.

RW22 SLIDER 4600  
218° 4600 GP 3.00° TCH 50

CATEGORY	A	B	C	D
RNP 0.14 DA	3884-½	278 (300-½)		
RNP 0.30 DA	3958-¾	352 (400-¾)		

AUTHORIZATION REQUIRED